


XRN-410S

4CH 8M H.265 сетевой видеорегистратор с PoE коммутатором




Key Features

- Поддержка камеры до 4 каналов, 8 Мп
- Поддержка кодеков H.265, H.264, MJPEG
- Поддержка функции WiseStream
- Скорость записи сетевой камеры 50 Мбит/с
- 4 порта PoE/PoE+ с поддержкой Plug & play
- Поддержка 1 жесткого диска
- Локальный монитор HDMI/VGA
- Поддержка резервирования для восстановления при отказе сети (ARB)
- Поддержка соединения P2P (подключение по QR-коду)

Display		
Network camera	Inputs	Max. 4CH
	Resolution	8MP ~ CIF
	Protocols	Wisenet, ONVIF
Decoding	Local Display	[Clone Display] HDMI: 3840 x 2160, 1920x1080, 1280x720 VGA: 1920x1080, 1280x720
	Resolution	8MP(60fps), 5MP(90fps), 3MP(120fps), 2MP(240fps), 720p(240fps), D1(240fps)
Performance		
Record	Compression	H.265, H.264, MJPEG
	Recording Bandwidth	Max. 50Mbps
	Resolution	8MP ~ CIF
	Mode	Normal, Schedule(Continuous/Event), Event (Pre/Post)
	Event Trigger	Alarm Input, Video Loss, Camera Event(Alarm, MD, Video Analytics, Defocus)
	Event Action	e-Mail, PTZ Preset, Alarm Out, Buzzer, Monitor Out
Search & Play	Playback Bandwidth	Max. 32Mbps(4CH simultaneously)
	User	Max. 4 Users (Local 1, Remote 3)
	Simultaneous playback	Max. 4CH(Local Monitor, Network)
	Fisheye Dewarping	WEB / CMS
Storage	Supported HDD	Up to 6TB
	HDD Slot	SATA 1ea(Max. 6TB)
Backup	File backup	BU/Exe(GUI), JPG/AVI(Network)
	Function	Multi channel(Upto 4CH) Play, Date-Time/Title display
Network		
Protocol		IPv4, IPv6, TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)
DDNS		Wisenet DDNS
Transmission Bandwidth		Max. 64Mbps
Audio	Input/Output	4 CH(network)
	Compression	G.711, G.726, AAC(16/48KHz)
	Audio Communication	2-Way
Max Remote Users		Search(3), Live Unicast(10), Multicast(20)
Security		IP address filtering, User access Log, 802.1x, Encryption
Web viewer	Supported OS	Windows 7, 8, 10, Mac OS X 10.9. 10.10. 10.11
	Supported browser	Plug-in free web viewer - Supported Browser: Google Chrome 47, MS Edge 20 Plug-in Webviewer - Supported MS Explore 11, Apple Safari 9 * Mac OS X only

Viewer Software		SSM, Webviewer, Smart Viewer, Wisenet mobile Support SDK/CGI(SUNAPI) for integration to 3'rd party VMS
Functions		
Camera Setup	Item	IP address, Add profile edit, Bitrate, Compression, GOP, Quality, Camera MD setup Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSDR, DIS), Fisheye Dewarping Mode, Hallway View Setup, Camera Webpage
PTZ	Control	Via GUI, Webviewer, SPC-2000
Smart phone	Support Model	iOS, Android
	Protocol Support	RTP, RTSP, HTTP, CGI(SUNAPI)
	Control	Live(Multi-Profile Support), Playback
	Max. Remote Users	Search(3), Live Unicast(10)
Redundancy	ARB	Support
Easy configuration		P2P(QR code)
Interface		
HDMI		1EA
VGA		1EA
e-SATA		1EA
Audio		Out(1EA, RCA, Line)
Ethernet		RJ-45(10/100/1000BASE-T) x 1 RJ-45(PoE+) x 4
Alarm		In 4EA, Out 2EA
USB		2EA(Front 1, Rear 1)
System		
System Control		Mouse, IR remocon, Web, Controller (SPC-2000)
Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai
Environmental		
Operating Temperature		0°C to +40°C(32°F to 104°F)
Operating Humidity		20% ~ 85% RH
Electrical		
Power Input		54V DC / 1.67A
Power Consumption		MAX. 13W (44BTU, 2TB HDD x 1ea)
PoE Budget		Max. 50W
Mechanical		
Color / Material		Black / Metal
Dimension (WxHxD)		W300 x H47 x D208.7mm (11.81"X1.85"X8.22") (1U)
Weight		1.694Kg

- The latest product information / specification can be found at hanwha-security.com
- Design and specifications are subject to change without notice.
- Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.

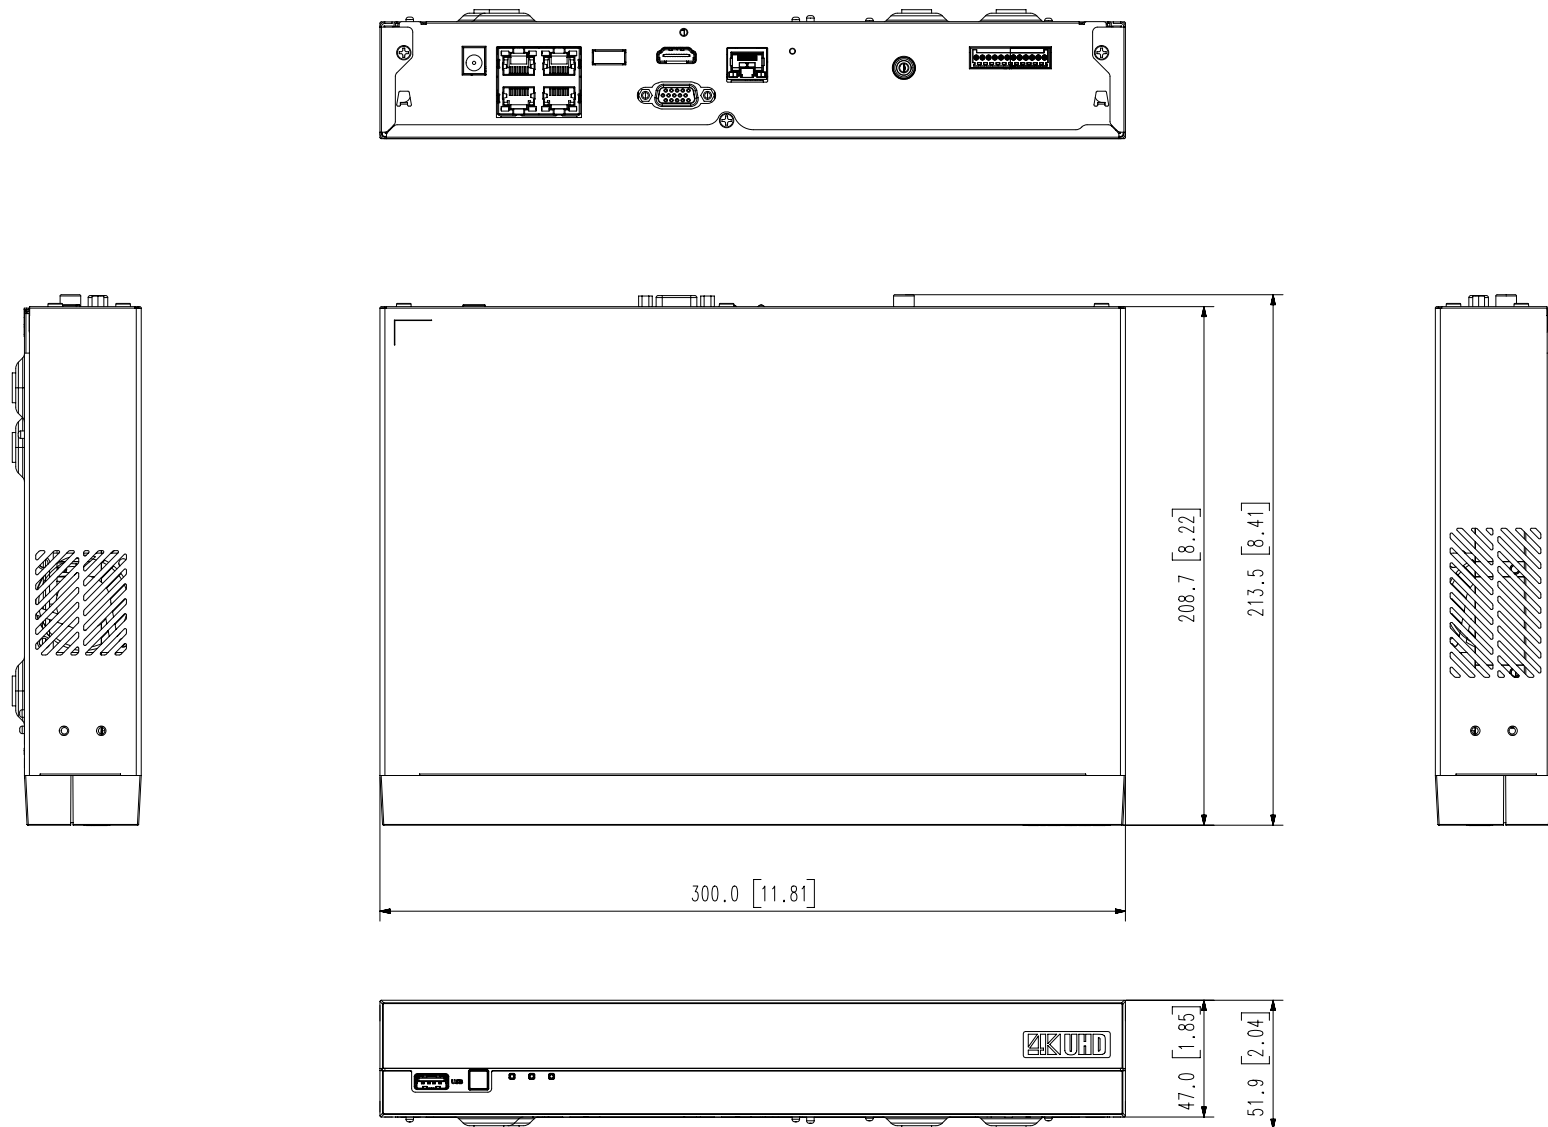

Appearance Drawing XRN-410S
Unit : mm[inch]