

# R&S® SPECTRUM RIDER FPH HANDHELD SPECTRUM ANALYZER

## Specifications

3  
year  
warranty



Data Sheet  
Version 11.00

**ROHDE & SCHWARZ**

Make ideas real



# CONTENTS

<b>Definitions .....</b>	<b>3</b>
<b>Specifications.....</b>	<b>4</b>
Frequency .....	4
Sweep time .....	4
Bandwidths.....	5
Level .....	5
Trigger functions.....	8
Inputs and outputs.....	9
General data.....	9
Equivalence of specifications for different R&S®FPH part numbers.....	10
R&S®FPH-B100 type N RF input connector for model .26 .....	10
R&S®FPH-K7 modulation analysis.....	11
R&S®FPH-K19 channel power meter.....	13
R&S®FPH-K29 pulse measurements with power sensor.....	13
R&S®FPH-K43 receiver mode and channel scan measurement.....	14
R&S®FPH-K57 advanced gated trigger measurement .....	14
R&S®HA-Z350 log-periodic OEM antenna .....	14
R&S®FSH-Z14 directional power sensor .....	15
R&S®FSH-Z44 directional power sensor .....	16
<b>Ordering information .....</b>	<b>18</b>
Options.....	18
Extras.....	18
Antennas and antenna accessories.....	19
R&S®NRP-Zxx power sensors supported by the R&S®Spectrum Rider FPH .....	20
Optical power sensors and accessories.....	21
Service options.....	21

# Definitions


## General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

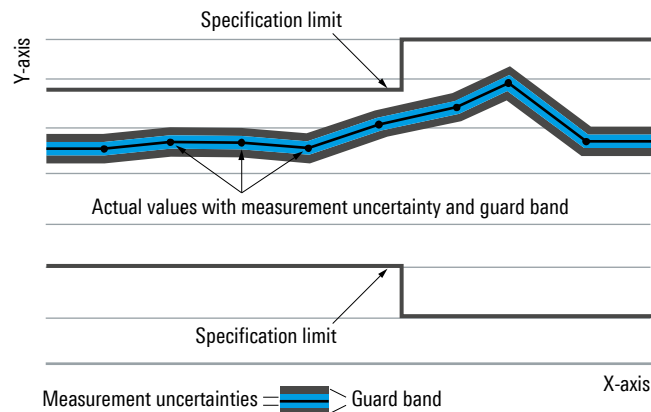

## Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under “Specifications with limits” above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format “parameter: value”.

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP/3GPP2 standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bits per second (Gbps), million bits per second (Mbps), thousand bits per second (kbps), million symbols per second (Msps) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, Msps, kbps, ksps and Msample/s are not SI units.

# Specifications

## Frequency

<b>Frequency range</b>	model .02	5 kHz to 2 GHz
	with R&S®FPH-B3 option installed	5 kHz to 3 GHz
	with R&S®FPH-B3 and R&S®FPH-B4 options installed	5 kHz to 4 GHz
	model .06	5 kHz to 6 GHz
	with R&S® FPH-B8 option installed	5 kHz to 8 GHz
	model .13	5 kHz to 13.6 GHz
	with R&S® FPH-B20 option installed	5 kHz to 20 GHz
	model .26	5 kHz to 26.5 GHz
with R&S® FPH-B31 option installed	5 kHz to 31 GHz	
<b>Frequency resolution</b>	models .06/.13/.26, with R&S® FPH-B29 option installed <sup>1</sup>	from 5 kHz down to 100 Hz
<b>Frequency resolution</b>		1 Hz

<b>Reference frequency, internal</b>		
Aging per year		$1 \times 10^{-6}$
Temperature drift	0 °C to +50 °C	$1 \times 10^{-6}$
Achievable initial calibration accuracy		$5 \times 10^{-7}$
Total reference uncertainty		(time since last adjustment × aging rate) + temperature drift + calibration accuracy

<b>Frequency readout</b>		
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference uncertainty} + 10 \% \times \text{resolution bandwidth} + \frac{1}{2} (\text{span} / (\text{sweep points} - 1) + 1 \text{ Hz}))$
Number of sweep (trace) points		711
Marker tuning frequency step size		span/710
Frequency counter resolution		0.1 Hz
Count uncertainty	SNR > 25 dB	$\pm(\text{frequency} \times \text{reference uncertainty} + \frac{1}{2} (\text{last digit}))$
Frequency span		0 Hz, 10 Hz to 2/3/4/6/8/13.6/20/26.5/31 GHz
Span uncertainty		1 % (nom.)

<b>Spectral purity SSB phase noise</b>		
Carrier offset	30 kHz	f = 500 MHz < -88 dBc (1 Hz), -95 dBc (1 Hz) (typ.)
	100 kHz	< -98 dBc (1 Hz), -105 dBc (1 Hz) (typ.)
	1 MHz	< -118 dBc (1 Hz), -125 dBc (1 Hz) (typ.)

## Sweep time

Sweep time	span = 0 Hz	1 ms to 1000 s
	10 Hz ≤ span ≤ 600 MHz	20 ms to 1000 s
	span > 600 MHz	20 ms × span/1600 MHz to 1000 s
Uncertainty	span = 0 Hz	1 % (nom.)
	span ≥ 10 Hz	3 % (nom.)

<sup>1</sup> For serial number ≥ 103100. Not applicable to R&S®Spectrum Rider FPH model .02.

## Bandwidths

Resolution bandwidths		
Range	-3 dB bandwidths	1 Hz to 3 MHz in 1/3 sequence
Bandwidth accuracy	$1 \text{ Hz} \leq \text{RBW} \leq 300 \text{ kHz}$	< 5 % (nom.)
	$300 \text{ kHz} < \text{RBW} \leq 1 \text{ MHz}$	< 10 % (nom.)
Selectivity 60 dB:3 dB		< 5 (nom.) (Gaussian type filters)
Video filters		
Range	-3 dB bandwidths	1 Hz to 3 MHz in 1/3 sequence

## Level

Display range		displayed noise floor to +30 dBm
Maximum rated input level with RF attenuation $\geq 10$ dB		
DC voltage		50 V
CW RF power	model .02	33 dBm (= 2 W)
	models .06/.13/.26	27 dBm (= 0.5 W)
Peak RF power (duration < 3 s)	model .02	36 dBm (= 4 W)
	models .06/.13/.26	30 dBm (= 1 W)
Maximum rated input level with RF attenuation < 10 dB		
DC voltage		50 V
CW RF power	model .02	20 dBm (= 100 mW)
	models .06/.13/.26	20 dBm (= 100 mW)
Peak RF power (duration < 3 s)	model .02	23 dBm (= 200 mW)
	models .06/.13/.26	23 dBm (= 200 mW)
Intermodulation		
Third order intercept (TOI)	intermodulation-free dynamic range, signal level -20 dBm (both), RF attenuation = 0 dB, RF preamplifier = off	
	model .02	
	f = 1 GHz	+7 dBm (meas.)
	f = 2.4 GHz	+10 dBm (meas.)
	models .06/.13/.26	
	f = 1 GHz	+7 dBm (meas.)
	f = 4.5 GHz	+8 dBm (meas.)
	f = 9.5 GHz	+10 dBm (meas.)
	f = 12 GHz	+9 dBm (meas.)
	f = 22 GHz	+8 dBm (meas.)
	f = 26.5 GHz	+10 dBm (meas.)
Second harmonic intercept (SHI)	RF attenuation = 0 dB, RF preamplifier = off, signal level = -40 dBm	
	model .02	
	$f_{in} = 20 \text{ MHz to } 1.5 \text{ GHz}$	-60 dBc (nom.)
	$f_{in} = 1.5 \text{ GHz to } 2 \text{ GHz}$	-80 dBc (nom.)
	models .06/.13/.26	
	$f_{in} = 20 \text{ MHz to } 1.5 \text{ GHz}$	-60 dBc (nom.)
	$f_{in} = 1.5 \text{ GHz to } 4 \text{ GHz}$	-90 dBc (nom.)
	$f_{in} = 4 \text{ GHz to } 10 \text{ GHz}$	-90 dBc (nom.)
	$f_{in} = 10 \text{ GHz to } 14 \text{ GHz}$	-90 dBc (nom.)
	$f_{in} = 14 \text{ GHz to } 15.4 \text{ GHz}$	-85 dBc (nom.)

Displayed average noise level (DANL)	0 dB RF attenuation, termination 50 $\Omega$ , RBW = 1 kHz, VBW = 10 Hz, sample detector, log. scaling, normalized to 1 Hz	
	model .02	
	preamplifier = off	
	1 MHz to 10 MHz	< -135 dBm, -142 dBm (typ.)
	10 MHz to 1 GHz	< -142 dBm, -146 dBm (typ.)
	1 GHz to 4 GHz	< -140 dBm, -144 dBm (typ.)
	preamplifier = on	
	1 MHz to 10 MHz	< -150 dBm, -160 dBm (typ.)
	10 MHz to 3 GHz	< -158 dBm, -163 dBm (typ.)
	3 GHz to 4 GHz	< -156 dBm, -161 dBm (typ.)
	models .06/.13/.26	
	preamplifier = off	
	1 MHz to 10 MHz	< -122 dBm, -130 dBm (typ.)
	10 MHz to 25 MHz	< -130 dBm, -135 dBm (typ.)
	25 MHz to 1 GHz	< -140 dBm, -145 dBm (typ.)
	1 GHz to 4 GHz	< -135 dBm, -140 dBm (typ.)
	4 GHz to 8 GHz	< -135 dBm, -140 dBm (typ.)
	8 GHz to 19 GHz	< -135 dBm, -138 dBm (typ.)
	19 GHz to 20 GHz	< -130 dBm, -138 dBm (typ.)
	20 GHz to 27 GHz	< -130 dBm, -138 dBm (typ.)
	27 GHz to 29 GHz	< -125 dBm, -130 dBm (typ.)
	29 GHz to 31 GHz	< -120 dBm, -123 dBm (typ.)
	preamplifier = on	
	1 MHz to 20 MHz	< -147 dBm, -152 dBm (typ.)
	20 MHz to 1 GHz	< -158 dBm, -162 dBm (typ.)
	1 GHz to 3 GHz	< -158 dBm, -162 dBm (typ.)
	3 GHz to 4 GHz	< -155 dBm, -158 dBm (typ.)
	4 GHz to 4.5 GHz	< -155 dBm, -158 dBm (typ.)
	4.5 GHz to 8 GHz	< -150 dBm, -155 dBm (typ.)
	8 GHz to 20 GHz	< -150 dBm, -155 dBm (typ.)
20 GHz to 27 GHz	< -150 dBm, -155 dBm (typ.)	
27 GHz to 29 GHz	< -140 dBm, -145 dBm (typ.)	
29 GHz to 31 GHz	< -130 dBm, -133 dBm (typ.)	

<b>Immunity to interference</b>		
Image frequencies	model .02	
	$f_{in} - 2 \times 30.15 \text{ MHz}$	< -70 dBc (nom.)
	$f_{in} - 2 \times 830.15 \text{ MHz}$	< -70 dBc (nom.)
	$f < 3 \text{ GHz}, f_{in} - 2 \times 830.15 \text{ MHz}$	< -70 dBc (nom.)
	$f < 3 \text{ GHz}, f_{in} - 2 \times 4042.65 \text{ MHz}$	-60 dBc (nom.)
	$f \geq 3 \text{ GHz}, f_{in} + 2 \times 830.15 \text{ MHz}$	-60 dBc (nom.)
	models .06/.13/.26	
	$f_{in} - 2 \times 30.15 \text{ MHz}$	< -70 dBc (nom.)
	$f_{in} - 2 \times 830.15 \text{ MHz}$	< -70 dBc (nom.)
	$f < 4 \text{ GHz}, f_{in} - 2 \times 830.15 \text{ MHz}$	< -70 dBc (nom.)
	$f < 4 \text{ GHz}, f_{in} + 2 \times 5582.35 \text{ MHz}$	< -50 dBc (nom.)
	$f < 4 \text{ GHz}, f_{in} + 2 \times 7230.15 \text{ MHz}$	< -50 dBc (nom.)
	$4 \text{ GHz} \leq f < 8 \text{ GHz},$ $f_{in} - 2 \times 830.15 \text{ MHz}$	< -70 dBc (nom.)
	$8 \text{ GHz} \leq f < 20 \text{ GHz},$ $f_{in} - 2 \times 830.15 \text{ MHz}$	< -70 dBc (nom.)
	$8 \text{ GHz} \leq f < 20 \text{ GHz},$ $f_{in} + 2 \times 4030.15 \text{ MHz}$	< -70 dBc (nom.)
	$8 \text{ GHz} \leq f < 20 \text{ GHz},$ $f_{in} + 2 \times 5582.35 \text{ MHz}$	< -70 dBc (nom.)
	$8 \text{ GHz} \leq f < 20 \text{ GHz},$ $f_{in} + 2 \times 7230.15 \text{ MHz}$	< -70 dBc (nom.)
	$20 \text{ GHz} \leq f < 26.5 \text{ GHz},$ $f_{in} - 2 \times 4030.15 \text{ MHz}$	< -40 dBc (nom.)
	$26.5 \text{ GHz} \leq f < 28.5 \text{ GHz},$ $f_{in} - 2 \times 7230.15 \text{ MHz}$	< -60 dBc (nom.)
	Intermediate frequencies	model .02
30.15 MHz, 830.15 MHz, 4042.65 MHz		< -60 dBc (nom.)
models .06/.13/.26		
30.5 MHz, 830.15 MHz, 4030.15 MHz		< -60 dBc (nom.)
5582.35 MHz		< -50 dBc (nom.)
7230.15 MHz	< -40 dBc (nom.)	
Other interfering signals, signal level – RF attenuation < -30 dBm	model .02	
	$f \leq 3 \text{ GHz},$ spurious at $f_{in} - 2021.325 \text{ MHz}$	< -60 dBc (nom.)
	models .06/.13/.26	
	$f < 4 \text{ GHz},$ spurious at $f_{in} + 2015.075 \text{ MHz}$	< -60 dBc (nom.)
	$4 \text{ GHz} \leq f < 8 \text{ GHz},$ $f_{in} - 415.075 \text{ MHz}$	< -60 dBc (nom.)
	$8 \text{ GHz} \leq f < 20 \text{ GHz},$ $f_{in} + 2015.075 \text{ MHz}$	< -60 dBc (nom.)
	$8 \text{ GHz} \leq f < 20 \text{ GHz},$ $f_{in} + 2791.175 \text{ MHz}$	< -60 dBc (nom.)
	$8 \text{ GHz} \leq f < 20 \text{ GHz},$ $f_{in} + 3615.075 \text{ MHz}$	< -60 dBc (nom.)
	$20 \text{ GHz} \leq f < 26.5 \text{ GHz},$ $f_{in} - 2015.075 \text{ MHz}$	< -60 dBc (nom.)
	$26.5 \text{ GHz} \leq f < 28.5 \text{ GHz},$ $f_{in} - 3615.075 \text{ MHz}$	< -60 dBc (nom.)
Other interfering signals, related to local oscillators	$f =$ receive frequency	
	model .02	
	$\Delta f \geq 300 \text{ kHz}$	< -60 dBc (nom.)
	models .06/.13/.26	
	$\Delta f \geq 300 \text{ kHz}, \Delta f \leq 1600 \text{ MHz}$	< -60 dBc (nom.) except otherwise stated
	$\Delta f \leq -422.5 \text{ MHz},$ $21440 \text{ MHz} \leq f_{in} < 23400 \text{ MHz}$	< -35 dBc (nom.)
$\Delta f \geq 1115 \text{ MHz},$ $23400 \text{ MHz} \leq f_{in} < 24400 \text{ MHz}$	< -40 dBc (nom.)	
Residual spurious response	input matched with 50 $\Omega$ , without input signal, RBW $\leq 30 \text{ kHz},$ $f \geq 3 \text{ MHz},$ RF attenuation = 0 dB	< -90 dBm (nom.)

<b>Level display</b>		
Logarithmic level axis		1/2/3/5/10/20/30/50/100/120/150 dB, 10 divisions
Linear level axis		0 % to 100 %, 10 divisions
Number of traces		2
Trace detectors		max. peak, min. peak, auto peak, sample, RMS
Trace functions		clear/write, max. hold, min. hold, average, view
Setting range of reference level		-130 dBm to +30 dBm
Units of level axis		dBm, dBmV, dBμV, V, W
<b>Level measurement uncertainty</b>		
Absolute level uncertainty at 100 MHz	temperature range from +20 °C to +30 °C	< 0.3 dB
	temperature range from +20 °C to +30 °C	
Frequency response <sup>2</sup>	100 Hz ≤ f < 5 kHz	< 3.0 dB (nom.) (only with R&S® FPH-B29 option installed, preamplifier off and attenuator settings ≤ 15 dB)
	5 kHz ≤ f < 10 MHz	< 1.5 dB (nom.)
	10 MHz ≤ f < 8 GHz	< 1 dB
	8 GHz ≤ f < 20 GHz	< 1.5 dB
	20 GHz ≤ f ≤ 31 GHz	< 2 dB
Attenuator uncertainty		< 0.3 dB
Uncertainty of reference level setting		< 0.1 dB (nom.)
Display nonlinearity	SNR > 16 dB, 0 dB to -50 dB, logarithmic level display	< 0.3 dB
Bandwidth switching uncertainty	reference: RBW = 10 kHz	< 0.1 dB (nom.)
Total measurement uncertainty	95 % confidence level, +20 °C to +30 °C, SNR > 16 dB, 0 dB to -50 dB below reference level, RF attenuation auto	
	10 MHz ≤ f ≤ 31 GHz	< 1.25 dB, 0.5 dB (typ.)

## Trigger functions

<b>Trigger</b>		
Trigger source		free run, video, external
External trigger level threshold	low → high transition	2.4 V
	high → low transition	0.7 V
	maximum	3.0 V
<b>Gated trigger</b>		
Gate delay		1 μs to 100 s, min. resolution 1 μs (or 1 % of delay)
Gate length		1 μs to 100 s, min. resolution 1 μs (or 1 % of gate length)

<sup>2</sup> For specifications with R&S® FPH-B100 option installed, see section "R&S® FPH-B100 N type RF input connector for model .26".



## Inputs and outputs

<b>RF input</b>		
Impedance		50 Ω (nom.)
Connector	models .02/.06/.13	type N, female
	model .26	PC 3.5 mm male
VSWR <sup>2</sup>	model .02	
	100 kHz ≤ f ≤ 1 GHz	< 1.5 (nom.)
	1 GHz < f ≤ 4 GHz	< 2 (nom.)
	models .06/.13/.26	
	100 kHz ≤ f ≤ 100 MHz	< 2 (nom.)
	100 MHz ≤ f ≤ 1 GHz	< 1.5 (nom.)
	1 GHz < f ≤ 31 GHz	< 2 (nom.)
Input attenuator	RF input only	0 dB to 40 dB, in 5 dB steps
<b>AF output</b>		
AF demodulation types		AM and FM
Connector		3.5 mm mini jack
Output impedance		32 Ω (nom.)
Voltage (open circuit)		adjustable from 0 V to > 100 mV (RMS)
<b>External reference, external trigger</b>		
Connector		BNC, 50 Ω
Mode		external reference, external trigger
External reference	required level	0 dBm
	frequency	10 MHz
External trigger threshold	low → high transition	2.4 V
	high → low transition	0.7 V

## General data

<b>Manual operation</b>		
Languages		Chinese, Chinese Traditional, English, French, German, Italian, Hungarian, Japanese, Korean, Portuguese, Russian, Spanish
<b>Remote control</b>		
Command set		SCPI 1997.0
LAN interface		10BASE-T/100BASE-T, RJ-45
USB		mini B plug, version 2.0
<b>Display</b>		
Resolution		WVGA, 800 × 480 pixel
<b>Audio</b>		
Speaker		internal, external headphone supported
<b>USB interface</b>		type A plug, version 2.0
	number of interfaces	2
<b>Mass memory</b>	not supplied	USB flash drive, USB version 1.1 or 2.0, size ≤ 32 Gbyte
		microSD card, size ≤ 32 Gbyte
Data storage	internal	> 160 instrument settings and traces
	on USB flash drive or microSD card, ≥ 1 Gbyte	> 10000 instrument settings and traces
<b>Temperature range</b>	operating	-10 °C to +55 °C
	storage	-20 °C to +50 °C
	battery charging mode	0 °C to +40 °C
<b>Climatic loading</b>	relative humidity	+25 °C/+55 °C at 95 % relative humidity, in line with EN 60068-2-30
	protection class	IP51
<b>Altitude</b>	operating with battery	15000 m (49210 ft)
	operating with AC to DC adapter	3000 m (9840 ft)
<b>Mechanical resistance</b>		
Vibration	sinusoidal	in line with EN 60068-2-6, MIL-PRF-28800F class 2
	random	in line with EN 60068-2-64, MIL-PRF-28800F class 2
Shock		40 g shock spectrum, in line with MIL-STD-810E, method 516.4 procedure 1, MIL-PRF-28800F

<b>Power supply</b>		
R&S®HA-Z301 AC power supply	input specifications	100 V to 240 V AC, 50 Hz/60 Hz, 1.0 A to 0.5 A
	output specifications	15 V, 2.67 A, max. 40 W
	operating temperature range	-30 °C to +60 °C
	storage temperature range	-40 °C to +85 °C
	test marks	CE, UL, PSE, TUV
External DC voltage		14.65 V to 15.45 V
Battery		lithium-ion battery
Capacity	R&S®HA-Z306	72 Wh
Voltage		11.25 V (nom.)
Operating time with new, fully charged battery	R&S®HA-Z306	
	R&S®Spectrum Rider FPH model .02	8 h
	R&S®Spectrum Rider FPH model .06	7 h
	R&S®Spectrum Rider FPH models .13/.26	6 h
Charging time	instrument switched off or charge with R&S®HA-Z303 battery charger	3.5 h
	instrument switched on	4 h
Life time	charging cycles	> 80 % or more of its initial capacity after 300 charges/discharges
Power consumption	model .02	8 W (meas.)
	model .06	10 W (meas.)
	models .13/.26	12 W (meas.)
Safety		IEC 61010-1, EN 61010-1, UL 61010-1 (Third Edition), CAN/CSA-C22.2 No. 61010-1-12
Test mark		VDE, CSA, CSA-NRTL
EMC	in line with European EMC Directive 2004/108/EC	<ul style="list-style-type: none"> <li>EN 61326-1 class B (emission)</li> <li>CISPR 11/EN 55011/group 1 class B (emission)</li> <li>EN 61326-1 table 2 (immunity, industrial)</li> </ul>
Dimensions	W x H x D	202 mm x 294 mm x 76 mm (8.0 in x 11.6 in x 3 in)
Weight		2.5 kg (5.5 lb)
<b>Recommended calibration interval</b>		1 year

## Equivalence of specifications for different R&S®FPH part numbers

- The specifications for part number 1321.1111.02 are equivalent to part number 1321.1111.52 and 1321.1111P01.
- The specifications for part number 1321.1111.06 are equivalent to part number 1321.1111.56 and 1321.1111P04.
- The specifications for part number 1321.1111.13 are equivalent to part number 1321.1111.63 and 1321.1111P06.
- The specifications for part number 1321.1111.26 are equivalent to part number 1321.1111.76 and 1321.1111P08.

## R&S®FPH-B100 type N RF input connector for model .26

Frequency range	model .26 with R&S® FPH-B100 option (R&S®FPH-B31 option is not available in combination with R&S®FPH-B100 option.)	5 kHz to 26.5 GHz
Frequency response	temperature range from +20 °C to +30 °C	
	5 kHz ≤ f < 10 MHz	< 1.5 dB (nom.)
	10 MHz ≤ f < 8 GHz	< 1 dB
	8 GHz ≤ f < 20 GHz	< 2 dB
	20 GHz ≤ f ≤ 26.5 GHz	< 2.5 dB
VSWR	100 kHz ≤ f ≤ 100 MHz	< 2 (nom.)
	100 MHz < f ≤ 1 GHz	< 1.5 (nom.)
	1 GHz < f ≤ 15.7 GHz	< 2 (nom.)
	15.7 GHz < f ≤ 26.5 GHz	< 2.7 (nom.)

## R&S®FPH-K7 modulation analysis

Measurement of analog modulation signals (AM, FM)		
Center frequency	model .02	500 kHz to 2 GHz
	with R&S®FPH-B3 option installed	500 kHz to 3 GHz
	with R&S®FPH-B3 and R&S®FPH-B4 options installed	500 kHz to 4 GHz
	model .06	500 kHz to 6 GHz
	with R&S®FPH-B8 option installed	500 kHz to 8 GHz
	model .13	500 kHz to 13.6 GHz
	with R&S®FPH-B20 option installed	500 kHz to 20 GHz
Demodulation bandwidth	model .26	500 kHz to 26.5 GHz
	with R&S®FPH-B31 option installed	500 kHz to 31 GHz
Bandwidth accuracy		2 MHz, 1 MHz, 500 kHz, 300 kHz, 200 kHz, 100 kHz, 50 kHz, 30 kHz, 20 kHz, 10 kHz (nom.)
Display	AM	< ± 5% (nom.)
	FM	carrier power, carrier frequency offset, AM modulation depth, modulation frequency, THD, SINAD, SNR
		carrier power, carrier frequency offset, FM deviation, modulation frequency, THD, SINAD, SNR

Carrier power		
Carrier power measurement accuracy		add 0.2 dB, see section level measurement uncertainty on page 13
Display resolution		0.1 dB

AF (modulation frequency) <sup>3</sup>		
Range	AM	20 Hz to 100 kHz (nom.)
	FM	20 Hz to 200 kHz (nom.)
Resolution		1 Hz
Measurement uncertainty	1 kHz ≤ AF ≤ 200 kHz	±(1 % of measured value) (nom.)
	20 Hz ≤ AF < 1 kHz	±1 Hz (nom.)
AF filters		
Lowpass	audio decimation	bypass, 1/10, 1/30, 1/100 (nom.)
Deemphasis	FM demodulation and demodulation bandwidth 200 kHz and 300 kHz	off, 50 μs, 75 μs (nom.)

AM demodulation <sup>4</sup>		
Measurement range	modulation depth	2 % to 100 % (nom.)
Modulation depth uncertainty		±(4 %) (nom.)

FM demodulation <sup>5</sup>		
Measurement range	frequency deviation	10 kHz to 400 kHz (nom.), max. 0.4 × demodulation bandwidth
Deviation uncertainty		±(0.04 × (AF + deviation)) (nom.)

Modulation distortion <sup>3, 4, 5</sup>		
Measurement functions		THD, SINAD
Measurement range		-50 dB to 0 dB (THD)
		0 dB to 50 dB (SINAD, AM)
		0 dB to 40 dB (SINAD, FM)
Display resolution		0.1 dB
Measurement uncertainty		1 dB (nom.)
AF frequency range		20 Hz to 100 kHz (nom.)

<sup>3</sup> Minimum and maximum detectable audio frequency and harmonics depend on the demodulation bandwidth and audio filter settings.

<sup>4</sup> Modulation frequency 1 kHz sine, AM modulation depth 50 %, carrier level 0 dBm, center frequency = 499 MHz, reference level 6 dBm, demodulation bandwidth = 20 kHz, SNR > 60 dB, audio filter = bypass.

<sup>5</sup> Modulation frequency 1 kHz sine, FM deviation = 75 kHz, carrier level 0 dBm, center frequency = 499 MHz, reference level 6 dBm, demodulation bandwidth = 300 kHz, SNR > 60 dB, audio filter = 1/10, deemphasis = off.

Measurement of digital modulation signals (ASK, FSK)		
Center frequency	model .02	10 MHz to 2 GHz
	with R&S®FPH-B3 option installed	10 MHz to 3 GHz
	with R&S®FPH-B3 and R&S®FPH-B4 options installed	10 MHz to 4 GHz
	model .06	10 MHz to 6 GHz
	with R&S®FPH-B8 option installed	10 MHz to 8 GHz
	model .13	10 MHz to 13.6 GHz
	with R&S®FPH-B20 option installed	10 MHz to 20 GHz
Demodulation bandwidth	model .26	10 MHz to 26.5 GHz
	with R&S®FPH-B31 option installed	10 MHz to 31 GHz
Display	ASK diagram	400 Hz to 2 MHz auto-set corresponding to signal and demodulation bandwidth requirements
	ASK numerical results	eye diagram, symbols, modulation depth, modulation error
	FSK diagram	carrier power, carrier frequency error, modulation depth and index, modulation error
	FSK numerical results	eye diagram, symbols, modulation deviation, modulation error
		carrier power, carrier frequency error, frequency deviation, modulation error, magnitude error

Demodulation parameters		
Modulation and demodulation filters	transmit filter	root raised cosine (RRC)
		raised cosine (RC)
		Gaussian (GAUSS)
		unfiltered <sup>6</sup>
		(Measurement and reference filters are internally adapted to signal parameters.)
Points/symbol		4, 8, 16, internally adapted to signal parameters
Filter length		internally adapted to signal parameters
Demodulation length		20 symbols to max. 1000 symbols (at 4 points/symbol)

Carrier power		
Carrier power measurement accuracy		add 0.2 dB, see section level measurement uncertainty on page 13
Carrier power range		-30 dBm to +20 dBm (nom.)
Display resolution		0.1 dB

ASK demodulation <sup>7</sup>		
Measurement range	symbol rate	1 kHz to 100 kHz (nom.)
	modulation depth	5 % to 95 % (nom.)
Modulation depth uncertainty		±(4 %) (nom.)
Display resolution		0.1 %

FSK demodulation <sup>8</sup>			
Measurement range	symbol rate	1 kHz to 100 kHz (nom.)	
	frequency deviation	1 kHz to 400 kHz (nom.)	
	symbol rate	1 kHz to 20 kHz	$1 \leq \beta^9 \leq 20$
		> 20 kHz to 50 kHz	$1 \leq \beta \leq 8$
> 50 kHz to 100 kHz		$1 \leq \beta \leq 4$	
Accuracy		± (4 %) (nom.)	
Display resolution		0.1 Hz	

<sup>6</sup> Reference signal is generated with a Gaussian filter, BT = 3.

<sup>7</sup> ASK modulation index 50 %, symbol rate = 100 kHz, Gaussian BT = 1.0, modulation signal PSBS.

<sup>8</sup> FSK modulation deviation 100 kHz, symbol rate = 100 kHz, Gaussian BT = 1.0, modulation signal PRBS.

<sup>9</sup> Beta is the ratio of frequency deviation to symbol rate.

## R&S®FPH-K19 channel power meter

Frequency range	model .02	5 kHz to 2 GHz
	with R&S®FPH-B3 option installed	5 kHz to 3 GHz
	with R&S®FPH-B3 and R&S®FPH-B4 options installed	5 kHz to 4 GHz
	model .06	5 kHz to 6 GHz
	with R&S®FPH-B8 option installed	5 kHz to 8 GHz
	model .13	5 kHz to 13.6 GHz
	with R&S®FPH-B20 option installed	5 kHz to 20 GHz
Channel bandwidth	model .26	5 kHz to 26.5 GHz
	with R&S®FPH-B31 option installed	5 kHz to 31 GHz
Amplitude		100 kHz to 1 GHz
Unit		offset, dB relative, zeroing
Limits		dBm, W
Measurement range		on/off, upper limit, lower limit, beep on fail
<b>Level measurement uncertainty</b>		
Absolute level uncertainty at 100 MHz	+20 °C to +30 °C	-120 dBm to +30 dBm
Frequency response (+20 °C to +30 °C)	100 kHz ≤ f < 10 MHz	< 0.3 dB
	10 MHz ≤ f ≤ 4 GHz	< 1.5 dB (nom.)
		< 1.25 dB

## R&S®FPH-K29 pulse measurements with power sensor

In combination with one of the R&S®NRP-Z81, R&S®NRP-Z85 or R&S®NRP-Z86 power sensors, the R&S®Spectrum Rider FPH supports measurements on pulsed signals. The achievable RF performance is documented in the data sheet specifications of the R&S®NRP-Z81, R&S®NRP-Z85, R&S®NRP-Z86 power sensors. The list below shows which measurements are supported by the R&S®FPH-K29.

Measurements	R&S®FPH-K29
Pulse power parameters	•
Peak power	•
Pulse top power	•
Average power	•
Base power	•
Minimum power	•
Positive overshoot	•
Negative overshoot	•
Pulse timing parameters	•
Pulse duration	•
Pulse period	•
Pulse start/stop time	•
Rise/fall time	•
Duty cycle	•

## R&S®FPH-K43 receiver mode and channel scan measurement application

The specifications below apply to the R&S®Spectrum Rider FPH. They are based on the data sheet specifications of the R&S®Spectrum Rider FPH, have not been checked separately and are not verified during instrument calibration.

Measurements	R&S®FPH-K43
Fixed frequency	•
Frequency scan	•
Channel scan	•
User defined channel list	•
EMI precompliance	•
CISPR bandwidths	•
CISPR detectors	•

Frequency range		see basic instrument
Measurement modes		fixed frequency, frequency scan, channel scan
Frequency scan stepsize		
Scan stepsize		100 Hz to max. frequency
Maximum number of steps		10000
Channel scan		
Channel spacing		user definable
Maximum number of channels		10000
Resolution bandwidths	-3 dB bandwidths	1 Hz to 3 MHz in 1/3 sequence
	-6 dB CISPR bandwidths	200 Hz, 9 kHz, 120 kHz, 1 MHz
Detectors		max. peak, average, RMS, quasi-peak
Level		see basic instrument

## R&S®FPH-K57 advanced gated trigger measurement

The specifications below apply to the R&S®Spectrum Rider FPH. They are based on the data sheet specifications of the R&S®Spectrum Rider FPH, have not been checked separately and are not verified during instrument calibration. Advanced gated trigger measurements are used for analysis of periodic time domain signal measurements and applicable only to the below mentioned measurement modes.

Measurements	R&S®FPH-K57
Occupied bandwidth (OBW)	•
Spectrum emission mask (SEM)	•
Adjacent channel leakage ratio (ACLR)	•

Frequency range		see basic instrument
Resolution bandwidths	-3 dB bandwidths	30 kHz to 3 MHz in 1/3 sequence
Video bandwidths		30 kHz to 3 MHz in 1/3 sequence
Detectors		see basic instrument
Auto gate detection	minimum distance, high level to low level	10 dB

## R&S®HA-Z350 log-periodic OEM antenna

Frequency range		700 MHz to 4 GHz
Gain		4 dBi (typ.)
Impedance		50 Ω
VSWR		< 1:2 (nom.)
Connector type		SMA (f)
Dimensions	W x H x D	340 mm x 200 mm x 25 mm (13.3 in x 7.9 in x 1 in)
Weight		270 g (0.6 lb)
Accessories supplied		hardcase with foam, typical calibration data in 10 MHz steps, pistol grip with mini-tripod function, one set of SMA toolset

## R&S®FSH-Z14 directional power sensor <sup>10</sup>

Frequency range		25 MHz to 1 GHz
Power measurement range		30 mW to 300 W
VSWR referenced to 50 Ω		< 1.06
Power handling capacity	depending on temperature and matching (see diagram on page 16)	100 W to 1000 W
Insertion loss		< 0.06 dB
Directivity		> 30 dB

Average power		
Power measurement range		
CW, FM, PM, FSK, GMSK	CF: ratio of peak envelope	30 mW to 300 W
Modulated signals	power to average power	30 mW to 300 W/CF
Measurement uncertainty		
25 MHz to 40 MHz	sine signal	4.0 % of measured value (0.17 dB)
40 MHz to 1 GHz	+18 °C to +28 °C, no zero offset	3.2 % of measured value (0.14 dB)
Zero offset	after zeroing	±4 mW
Range of typical measurement error with modulation	FM, PM, FSK, GMSK	0 % of measured value (0 dB)
	AM (80 %)	±3 % of measured value (±0.13 dB)
	two CW carriers with identical power	±2 % of measured value (±0.09 dB)
	EDGE, TETRA	±0.5 % of measured value (±0.02 dB) <sup>11</sup>
Temperature coefficient	25 MHz to 40 MHz	0.40 %/K (0.017 dB/K)
	40 MHz to 1 GHz	0.25 %/K (0.011 dB/K)


Maximum peak envelope power		
Power measurement range		
Video bandwidths	4 kHz	0.4 W to 300 W
	200 kHz	1 W to 300 W
	600 kHz	2 W to 300 W
Measurement uncertainty	same as for average power plus effect of peak hold circuit	+18 °C to +28 °C
Error limits of peak hold circuit for burst signals	duty cycle ≥ 0.1 and repetition rate ≥ 100/s	
	video bandwidth 4 kHz	±(3 % of measured value + 0.05 W), starting from a burst width of 200 μs
	video bandwidth 200 kHz	±(3 % of measured value + 0.20 W), starting from a burst width of 4 μs
	video bandwidth 600 kHz	±(7 % of measured value + 0.40 W), starting from a burst width of 2 μs
	20/s ≤ repetition rate < 100/s	plus ±(1.6 % of measured value + 0.15 W)
	0.001 ≤ duty cycle < 0.1	plus ±0.10 W
Temperature coefficient	25 MHz to 40 MHz	0.50 %/K (0.022 dB/K)
	40 MHz to 1 GHz	0.35 %/K (0.015 dB/K)

Load matching		
Matching measurement range		
Return loss		0 dB to 23 dB
VSWR		> 1.15
Minimum forward power	specifications complied with ≥ 0.4 W	0.06 W


Dimensions and weight		
Dimensions	W x H x D	120 mm x 95 mm x 39 mm (4.72 in x 3.74 in x 1.53 in)
	connecting cable	1.5 m (59 in)
Weight		0.65 kg (1.43 lb)

<sup>10</sup> Requires R&S®FSH-Z144 adapter cable.

<sup>11</sup> If standard is selected on the R&S®Spectrum Rider FPH.

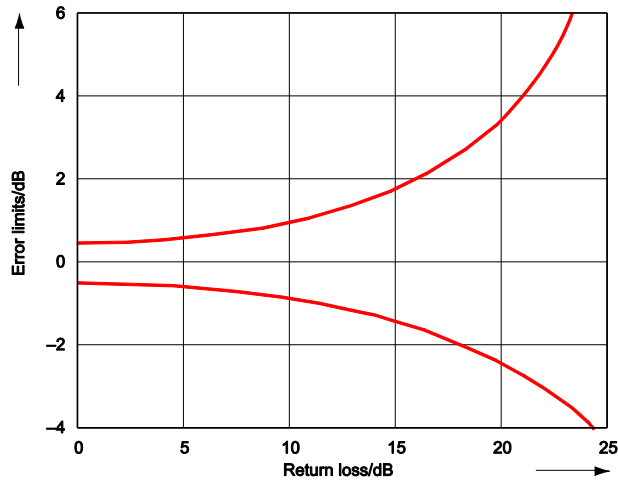

Error limits for matching measurements

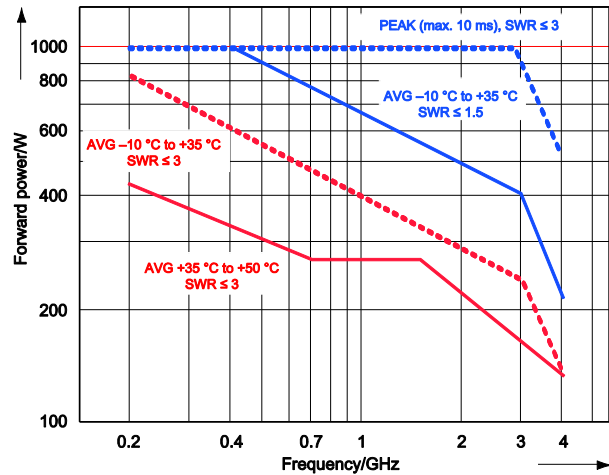

Power handling capacity

## R&S®FSH-Z44 directional power sensor <sup>12</sup>

Frequency range		200 MHz to 4 GHz
Power measurement range		30 mW to 300 W
VSWR referenced to 50 Ω	200 MHz to 3 GHz	< 1.07
	3 GHz to 4 GHz	< 1.12
Power handling capacity	depending on temperature and matching (see diagram on page 17)	120 W to 1000 W
Insertion loss	200 MHz to 1.5 GHz	< 0.06 dB
	1.5 GHz to 4 GHz	< 0.09 dB
Directivity	200 MHz to 3 GHz	> 30 dB
	3 GHz to 4 GHz	> 26 dB

Average power		
Power measurement range	CF: ratio of peak envelope power to average power	
	CW, FM, PM, FSK, GMSK	30 mW to 300 W
	LTE, 3GPP WCDMA, cdmaOne, CDMA2000®, DAB, DVB-T	30 mW to 120 W
	other modulated signals	30 mW to 300 W/CF
Measurement uncertainty	sine signal, +18 °C to +28 °C, no zero offset	
	200 MHz to 300 MHz	4.0 % of measured value (0.17 dB)
	300 MHz to 4 GHz	3.2 % of measured value (0.14 dB)
Zero offset	after zeroing	±4 mW
Range of typical measurement error with modulation	FM, PM, FSK, GMSK	0 % of measured value (0 dB)
	AM (80 %)	±3 % of measured value (±0.13 dB)
	two CW carriers with identical power	±2 % of measured value (±0.09 dB)
	π/4-DQPSK	±2 % of measured value (±0.09 dB)
	EDGE	±0.5 % of measured value (±0.02 dB) <sup>13</sup>
	cdmaOne, DAB	±1 % of measured value (±0.04 dB) <sup>9</sup>
	3GPP WCDMA, CDMA2000®	±2 % of measured value (±0.09 dB) <sup>9</sup>
Temperature coefficient	DVB-T	±2 % of measured value (±0.09 dB) <sup>9</sup>
	200 MHz to 300 MHz	0.40 %/K (0.017 dB/K)
	300 MHz to 4 GHz	0.25 %/K (0.011 dB/K)

<sup>12</sup> Requires R&S®FSH-Z144 adapter cable.


<sup>13</sup> If standard is selected on the R&S®Spectrum Rider FPH.




<b>Maximum peak envelope power</b>		
Power measurement range		
DAB, DVB-T, cdmaOne, CDMA2000®, 3GPP WCDMA		4 W to 300 W
Other signals at video bandwidth	4 kHz	0.4 W to 300 W
	200 kHz	1 W to 300 W
	4 MHz	2 W to 300 W
Measurement uncertainty	+18 °C to +28 °C	same as for average power plus effect of peak hold circuit
Error limits of peak hold circuit for burst signals	duty cycle $\geq 0.1$ and repetition rate $\geq 100/s$	
	video bandwidth 4 kHz	$\pm(3\%$ of measured value + 0.05 W) starting from a burst width of 100 $\mu s$
	video bandwidth 200 kHz	$\pm(3\%$ of measured value + 0.20 W) starting from a burst width of 4 $\mu s$
	video bandwidth 4 MHz	$\pm(7\%$ of measured value + 0.40 W) starting from a burst width of 1 $\mu s$
	20/s $\leq$ repetition rate < 100/s	plus $\pm(1.6\%$ of measured value + 0.15 W)
	0.001 $\leq$ duty cycle < 0.1	plus $\pm 0.10$ W
	burst width $\geq 0.5 \mu s$	plus $\pm 5\%$ of measured value
	burst width $\geq 0.2 \mu s$	plus $\pm 10\%$ of measured value
Range of typical measurement error of peak hold circuit	video bandwidth 4 MHz and standard selected on the R&S®FPH4/8/13/20	
	cdmaOne, DAB	$\pm(5\%$ of measured value + 0.4 W)
	DVB-T, CDMA2000®, 3GPP WCDMA	$\pm(15\%$ of measured value + 0.4 W)
Temperature coefficient	200 MHz to 300 MHz	0.50 %/K (0.022 dB/K)
	300 MHz to 4 GHz	0.35 %/K (0.015 dB/K)

<b>Load matching</b>		
Matching measurement range		
Return loss	200 MHz to 3 GHz	0 dB to +23 dB
VSWR	3 GHz to 4 GHz	0 dB to +20 dB
VSWR	200 MHz to 3 GHz	> 1.15
	3 GHz to 4 GHz	> 1.22
Minimum forward power	specifications complied with $\geq 0.2$ W	0.03 W

<b>Dimensions and weight</b>		
Dimensions	W x H x D	120 mm x 95 mm x 39 mm (4.72 in x 3.74 in x 1.53 in)
	connecting cable	1.5 m (59 in)
Weight		0.65 kg (1.43 lb)

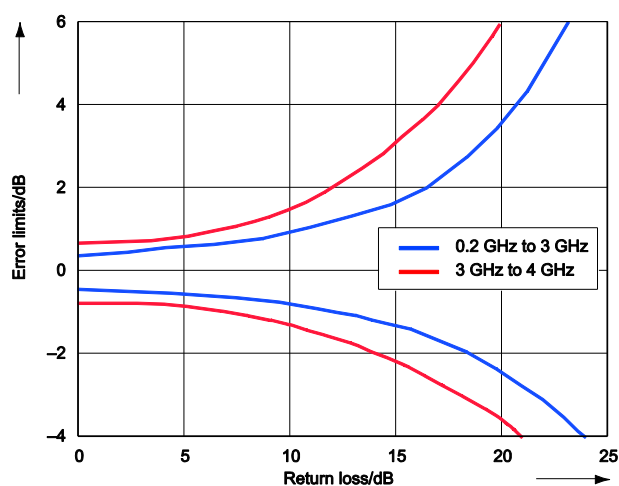

Error limits for matching measurements

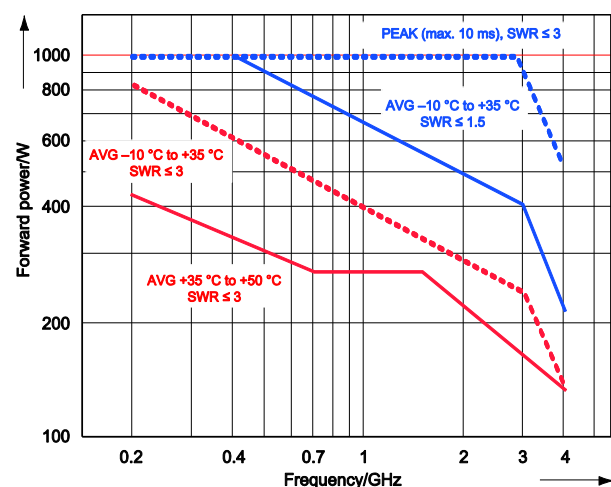

Power handling capacity

## Ordering information

Designation	Type	Order No.
Handheld spectrum analyzer, 5 kHz to 2 GHz	R&S®Spectrum Rider FPH	1321.1111.02
Handheld spectrum analyzer, 5 kHz to 6 GHz	R&S®Spectrum Rider FPH	1321.1111.06
Handheld spectrum analyzer, 5 kHz to 13.6 GHz	R&S®Spectrum Rider FPH	1321.1111.13
Handheld spectrum analyzer, 5 kHz to 26.5 GHz	R&S®Spectrum Rider FPH	1321.1111.26
<b>Accessories supplied</b>		
Lithium-ion battery pack, USB cable, AC power supply with country specific adapters for EU, GB, US, AUS, CH, documentation, quick start guide, side strap		

## Options

Designation	Type	Order No.
Spectrum analyzer frequency upgrade, 2 GHz to 3 GHz <sup>14</sup>	R&S®FPH-B3	1321.0667.02
Spectrum analyzer frequency upgrade, 3 GHz to 4 GHz <sup>14</sup> (requires R&S®FPH-B3)	R&S®FPH-B4	1321.0673.02
Spectrum analyzer frequency upgrade, 6 GHz to 8 GHz <sup>15</sup>	R&S®FPH-B8	1321.0767.02
Spectrum analyzer frequency upgrade, 13.6 GHz to 20 GHz <sup>16</sup>	R&S®FPH-B20	1321.0773.02
Spectrum analyzer frequency upgrade, 26.5 GHz to 31 GHz <sup>17, 18</sup>	R&S®FPH-B31	1321.0780.02
Spectrum analyzer preamplifier, 5 kHz to 4 GHz <sup>10</sup>	R&S®FPH-B22	1321.0680.02
Spectrum analyzer preamplifier, 5 kHz to 8 GHz <sup>11</sup>	R&S®FPH-B23	1321.0867.02
Spectrum analyzer preamplifier, 5 kHz to 20 GHz <sup>12</sup>	R&S®FPH-B24	1321.0850.02
Spectrum analyzer preamplifier, 5 kHz to 31 GHz <sup>13</sup>	R&S®FPH-B25	1321.0873.02
Type N RF input connector, for model .26 (factory installed) <sup>14</sup>	R&S®FPH-B100	1321.0596.02
Spectrum analyzer 100 Hz frequency extension, from 5 kHz down to 100 Hz <sup>19</sup>	R&S®FPH-B29	1334.8532.02
Analog modulation analysis AM, FM, ASK, FSK	R&S®FPH-K7	1321.0696.02
Power sensor support	R&S®FPH-K9	1321.0709.02
Interference analysis	R&S®FPH-K15	1321.0715.02
Signal strength mapping	R&S®FPH-K16	1321.0615.02
Channel power meter	R&S®FPH-K19	1321.0721.02
Pulse measurements, with power sensor	R&S®FPH-K29	1321.0738.02
Receiver mode and channel scanner	R&S®FPH-K43	1321.0621.02
Advanced gated trigger measurements	R&S®FPH-K57	1321.1586.02

## Extras

Designation	Type	Order No.
Battery charger for R&S®HA-Z306 <sup>20</sup>	R&S®HA-Z303	1321.1328.02
Lithium-ion battery pack, 6.4 Ah	R&S®HA-Z306	1321.1334.02
Spare power supply, incl. mains plug for EU, GB, US, AUS, CH	R&S®HA-Z301	1321.1386.02
Car adapter	R&S®HA-Z302	1321.1340.02
Carrying holster	R&S®HA-Z322	1321.1370.02
Rainproof carrying holster	R&S®HA-Z322	1321.1370.03
Soft carrying bag	R&S®HA-Z220	1309.6175.00
Hardcase	R&S®HA-Z321	1321.1357.02
Hard shell protective carrying case	R&S®RTH-Z4	1326.2774.02
Headphones	R&S®FSH-Z36	1145.5838.02
Spare USB cable	R&S®HA-Z211	1309.6169.00
Spare Ethernet cable	R&S®HA-Z210	1309.6152.00

<sup>14</sup> Applicable only to base unit with order no. 1321.1111.02.

<sup>15</sup> Applicable only to base unit with order no. 1321.1111.06.

<sup>16</sup> Applicable only to base unit with order no. 1321.1111.13.

<sup>17</sup> Applicable only to base unit with order no. 1321.1111.26.

<sup>18</sup> R&S®FPH-B31 option is not available in combination with R&S®FPH-B100 option.

<sup>19</sup> For serial number  $\geq$  103100. Not applicable to R&S®Spectrum Rider FPH model .02.

<sup>20</sup> The battery charger is dedicated for charging an additional battery outside the instrument. The battery can be charged via the instrument as well.

## Antennas and antenna accessories

Designation	Type	Order No.
Yagi antenna, 1710 MHz to 1990 MHz	R&S®HA-Z1900	1328.6825.02
Yagi antenna, 824 MHz to 960 MHz	R&S®HA-Z900	1328.6283.02
RF cable, length: 1 m, DC to 6 GHz, type N (m) – type N (m) connectors	R&S®HA-Z901	3626.2757.02
Carrying bag, for R&S®HA-Z900 or R&S®HA-Z1900 yagi antenna	R&S®HA-Z902	1328.6883.02
Basic handheld directional antenna (antenna handle)	R&S®HE400BC	4104.6000.04
RF cable, for R&S®HE400BC	R&S®HE400-KB	4104.7770.04
Handheld directional antenna (antenna handle)	R&S®HE400	4104.6000.02
Microwave handheld directional antenna (antenna handle)	R&S®HE400MW	4104.6000.03
Cable set, for R&S®HE400 and R&S®HE400MW (requires R&S®HE300USB)	R&S®HE400-K	4104.7770.02
HF antenna module, 8.3 kHz to 30 MHz	R&S®HE400HF	4104.8002.02
VHF antenna module, 20 MHz to 200 MHz	R&S®HE400VHF	4104.8202.02
UWB antenna module, 30 MHz to 6 GHz	R&S®HE400UWB	4104.6900.02
Log-periodic antenna module, 450 MHz to 8 GHz	R&S®HE400LP	4104.8402.02
Cellular antenna module, 700 MHz to 2500 MHz	R&S®HE400CEL	4104.7306.02
S band and C band antenna module, 1.7 GHz to 6 GHz	R&S®HE400SCB	4104.7606.02
SHF antenna module, 5 GHz to 20 GHz (with R&S®HE400BC and R&S®HE400MW antenna handle)	R&S®HE400SHF	4104.8602.02
USB adapter, for R&S®HE400 handheld directional antenna	R&S®HE300USB	4080.9440.02
Log-periodic OEM antenna, 700 MHz to 4 GHz	R&S®HA-Z350	1321.1405.02
Handheld directional antenna, with preamplifier	R&S®HE800-PA	4115.6006.02
Transport case, for R&S®HE800-PA	R&S®HE800Z1	4115.7660.02
RF cable, length: 1 m, DC to 8 GHz, armored, type N (m) – type N (f) connectors	R&S®FSH-Z320	1309.6600.00
RF cable, length: 3 m, DC to 8 GHz, armored, type N (m) – type N (f) connectors	R&S®FSH-Z321	1309.6617.00
GPS receiver, for R&S®Spectrum Rider FPH	R&S®HA-Z340	1321.1392.02
Portable EMF measurement system, hard case	R&S®TS-EMF	1158.9295.05
Isotropic antenna, 30 MHz to 3 GHz for R&S®TS-EMF	R&S®TSEMF-B1	1074.5719.02
Isotropic antenna, 700 MHz to 6 GHz for R&S®TS-EMF	R&S®TSEMF-B2	1074.5702.02
Isotropic antenna, 9 kHz to 200 MHz for R&S®TS-EMF	R&S®TSEMF-B3	1074.5690.02
Converter cable	R&S®TSEMF-CV	1158.9250.02
Matching pad, 50/75 Ω, L section	R&S®RAM	0358.5414.02
Matching pad, 50/75 Ω, series resistor 25 Ω	R&S®RAZ	0358.5714.02
Matching pad, 50/75 Ω, L section, type N – BNC	R&S®FSH-Z38	1300.7740.02
Adapter type N (m) – BNC (f)		0118.2812.00
Adapter type N (m) – type N (m)		0092.6581.00
Adapter type N (m) – SMA (f)		4012.5837.00
Adapter type N (m) – 7/16 (f)		3530.6646.00
Adapter type N (m) – 7/16 (m)		3530.6630.00
Adapter type N (m) – FME (f)		4048.9790.00
Adapter BNC (m) – banana (f)		0017.6742.00
Attenuator, 50 W, 20 dB, 50 Ω, DC to 6 GHz, type N (f) – type N (m)	R&S®RDL50	1035.1700.52
Attenuator, 100 W, 20 dB, 50 Ω, DC to 2 GHz, type N (f) – type N (m)	R&S®RBU100	1073.8495.20
Attenuator, 100 W, 30 dB, 50 Ω, DC to 2 GHz, type N (f) – type N (m)	R&S®RBU100	1073.8495.30
Compact probe set, for E and H near-field measurements, 30 MHz to 3 GHz	R&S®HZ-15	1147.2736.02
Near-field probe set, H field	R&S®HZ-17	1339.4141.02
Preamplifier (3 GHz, 20 dB), power adapter (100 V to 230 V), for R&S®HZ-15	R&S®HZ-16	1147.2720.02
Omnidirectional antenna, for circular right-hand polarization, 18 GHz to 26.5 GHz	R&S®AC004R1	0749.3000.03
Omnidirectional antenna, for circular left-hand polarization, 18 GHz to 26.5 GHz	R&S®AC004L1	4078.4000.02
Omnidirectional antenna, for circular right-hand polarization, 26.5 GHz to 40 GHz	R&S®AC004R2	0749.3251.03
Omnidirectional antenna, for circular left-hand polarization, 26.5 GHz to 40 GHz	R&S®AC004L2	4078.5006.02
Broadband omnidirectional antenna, 800 MHz to 26.5 GHz	R&S®HF907OM	4070.3279.02

Designation	Type	Order No.
Standard gain horn antenna, 26 GHz to 40 GHz, mid band gain 20 dB, WR 28	R&S®FH-SG-40	3629.2393.02
Standard gain horn antenna adapter	R&S®HA-Z370	1334.8432.02
Mast and tripod adapter	R&S®KM011Z8	4090.4006.02
Wooden tripod	R&S®HZ-1	0837.2310.02
Test port cable, 0 Hz to 26.5 GHz, 3.5 mm (f) to 3.5 mm (m), length: 635 mm	R&S®ZV-Z93	1301.7595.25
Test port cable, 0 Hz to 26.5 GHz, 3.5 mm (f) to 3.5 mm (m), length: 965 mm	R&S®ZV-Z93	1301.7595.38
Test port cable, 0 Hz to 26.5 GHz, 3.5 mm (f) to 3.5 mm (m), length: 610 mm	R&S®ZV-Z193	1306.4520.24
Test port cable, 0 Hz to 26.5 GHz, 3.5 mm (f) to 3.5 mm (m), length: 914 mm	R&S®ZV-Z193	1306.4520.36
Test port cable, 0 Hz to 26.5 GHz, 3.5 mm (f) to 3.5 mm (m), length: 1524 mm	R&S®ZV-Z193	1306.4520.60
Test port cable, 0 Hz to 40 GHz, 2.92 mm (f) to 2.92 mm (m), length: 635 mm	R&S®ZV-Z95	1301.7608.25
Test port cable, 0 Hz to 40 GHz, 2.92 mm (f) to 2.92 mm (m), length: 965 mm	R&S®ZV-Z95	1301.7608.38
Test port cable, 0 Hz to 40 GHz, 2.92 mm (f) to 2.92 mm (m), length: 610 mm	R&S®ZV-Z195	1306.4536.24
Test port cable, 0 Hz to 40 GHz, 2.92 mm (f) to 2.92 mm (m), length: 914 mm	R&S®ZV-Z195	1306.4536.36

## R&S®NRP-Zxx power sensors supported by the R&S®Spectrum Rider FPH <sup>21</sup>

Designation	Type	Order No.
Directional power sensor, 25 MHz to 1 GHz	R&S®FSH-Z14	1120.6001.02
Directional power sensor, 200 MHz to 4 GHz	R&S®FSH-Z44	1165.2305.02
Universal power sensor, 10 MHz to 8 GHz, 100 mW, two-path	R&S®NRP-Z211	1417.0409.02
Universal power sensor, 10 MHz to 18 GHz, 100 mW, two-path	R&S®NRP-Z221	1417.0309.02
Wideband power sensor, 50 MHz to 18 GHz, 100 mW	R&S®NRP-Z81	1137.9009.02
Wideband power sensor, 50 MHz to 40 GHz, 100 mW (2.92 mm)	R&S®NRP-Z85	1411.7501.02
Wideband power sensor, 50 MHz to 40 GHz, 100 mW (2.40 mm)	R&S®NRP-Z86	1417.0109.40
Wideband power sensor, 50 MHz to 44 GHz, 100 mW (2.40 mm)	R&S®NRP-Z86	1417.0109.44
Three-path diode power sensor, 100 pW to 200 mW, 10 MHz to 8 GHz	R&S®NRP8S	1419.0006.02
Three-path diode power sensor, 100 pW to 200 mW, 10 MHz to 18 GHz	R&S®NRP18S	1419.0029.02
Three-path diode power sensor, 100 pW to 200 mW, 10 MHz to 33 GHz	R&S®NRP33S	1419.0064.02
Three-path diode power sensor, 100 pW to 200 mW, 10 MHz to 40 GHz	R&S®NRP40S	1419.0041.02
Three-path diode power sensor, 100 pW to 200 mW, 10 MHz to 50 GHz	R&S®NRP50S	1419.0087.02
Thermal power sensor, 300 nW to 100 mW, DC to 18 GHz	R&S®NRP18T	1424.6115.02
Thermal power sensor, 300 nW to 100 mW, DC to 33 GHz	R&S®NRP33T	1424.6138.02
Thermal power sensor, 300 nW to 100 mW, DC to 40 GHz	R&S®NRP40T	1424.6150.02
Thermal power sensor, 300 nW to 100 mW, DC to 50 GHz	R&S®NRP50T	1424.6173.02
Thermal power sensor, 300 nW to 100 mW, DC to 67 GHz	R&S®NRP67T	1424.6196.02
Thermal power sensor, 300 nW to 100 mW, DC to 110 GHz	R&S®NRP110T	1424.6215.02
Average power sensor, 100 pW to 200 mW, 8 kHz to 6 GHz	R&S®NRP6A	1424.6796.02
Average power sensor, 100 pW to 200 mW, 8 kHz to 18 GHz	R&S®NRP18A	1424.6815.02
<b>R&amp;S®NRP-Zxx power sensors require the following adapter cable for operation on the R&amp;S®Spectrum Rider FPH</b>		
USB adapter cable, for R&S®FSH-Z14/R&S®FSH-Z44 power sensors	R&S®FSH-Z144	1145.5909.02
USB adapter cable (passive), length: 2 m, to connect R&S®NRP-Zxx S/SN power sensors to the R&S®Spectrum Rider FPH	R&S®NRP-Z4	1146.8001.02
<b>R&amp;S®NRP power sensors require the following adapter cable for operation on the R&amp;S®Spectrum Rider FPH</b>		
USB interface cable, length: 1.5 m, to connect R&S®NRP sensors to the R&S®Spectrum Rider FPH	R&S®NRP-ZKU	1419.0658.03

<sup>21</sup> For average power measurements only.

## Optical power sensors and accessories

Designation	Type	Order No.
OEM USB, optical power meter (Germanium)	R&S®HA-Z360	1334.5162.00
OEM USB, optical power meter (filtered InGaAs)	R&S®HA-Z361	1334.5179.00
SC adapter, for optical power meter	R&S®HA-Z362	1334.5185.00
LC adapter, for optical power meter	R&S®HA-Z363	1334.5191.00
2.5 mm universal adapter, for optical power meter	R&S®HA-Z364	1334.5204.00
1.25 mm universal adapter, for optical power meter	R&S®HA-Z365	1334.5210.00
Patch cord SC-LC SM, SX, length: 1 m	R&S®HA-Z366	1334.5227.00
Patch cord SC-SC SM, SX, length: 1 m	R&S®HA-Z367	1334.5233.00

## Service options

Warranty		
Base unit		3 years
All other items <sup>22</sup>		1 year
Options		
Extended warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended warranty, two years	R&S®WE2	
Extended warranty with calibration coverage, one year	R&S®CW1	
Extended warranty with calibration coverage, two years	R&S®CW2	
Extended warranty with accredited calibration coverage, one year	R&S®AW1	
Extended warranty with accredited calibration coverage, two years	R&S®AW2	

### Extended warranty with a term of one and two years (WE1 and WE2)

Repairs carried out during the contract term are free of charge <sup>23</sup>. Necessary calibration and adjustments carried out during repairs are also covered.

### Extended warranty with calibration coverage (CW1 and CW2)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs <sup>23</sup> and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

### Extended warranty with accredited calibration (AW1 and AW2)

Enhance your extended warranty by adding accredited calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated under accreditation, inspected and maintained during the term of the contract. It includes all repairs <sup>23</sup> and accredited calibration at the recommended intervals as well as any accredited calibration carried out during repairs or option upgrades.

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

<sup>22</sup> For options that are installed, the remaining base unit warranty applies if longer than 1 year. Exception: all batteries have a 1 year warranty.

<sup>23</sup> Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.





## Service that adds value

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

## Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, monitoring and network testing. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management  
**ISO 9001**

Certified Environmental Management  
**ISO 14001**

## Rohde & Schwarz training

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

## Rohde & Schwarz customer support

[www.rohde-schwarz.com/support](http://www.rohde-schwarz.com/support)

