

# Technical data sheet

## Nail anchor N with thread

Item no. 3498396



The nail anchor N can be used for multiple fastenings of non-load-bearing systems and in cracked and non-cracked concrete, thereby combining the benefits of a bolt tie with even easier mounting. The nail tie only needs to be hammered into the drill hole. It is not necessary to apply torque subsequently. When the load occurs, the nail tie spreads itself and bolts itself in the drill hole.

European Technical Approval ETA-11/0240, including characteristic values under fire exposure to fire resistance R 120.




**St** Steel

**G** Electrogalvanised

### Master data

Item no.	3498396
Type	N 6-5-10/49
Description 1	Nail anchor N
Description 2	with thread M6
Dimension	6x49mm
Material	Steel
Material symbol	St
Surface	Electrogalvanised
Surface to DIN	EN ISO 19598 / EN ISO 4042
Surface symbol	G
Smallest sales unit (VG)	100 Piece
Weight	1,16 kg/100 pc.

### Technical data

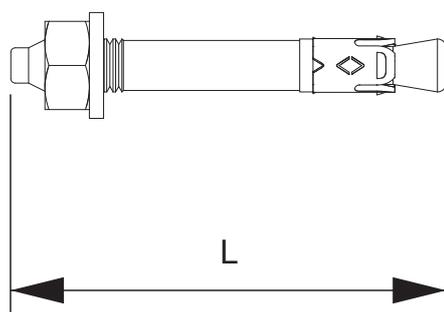

Length	49,00 mm
Dimension L	49,00 mm
Version	Lightning strike
Fastening unit	Other
Drill hole depth	40,00 mm
Drill hole diameter	6,00 mm
Clamping range	5-10 mm
Thread	M6
Thread metric	6
Self-drilling	<input type="checkbox"/>
Approvals available	<input checked="" type="checkbox"/>