



### Flush Mounted Box T-7718



Hole size(LxWxD):126x75x31 mm

### Surface Mounted Box T-7719



### Description

It is widely applied to indoor and outdoor environments' communications, anti-riot flood. With a key to call back to the control center.

### Features


- \* With Rectangular embedded design, simple and smooth appearance, sophisticated finish, and durable quality.
- \* With embedded industrial-grade dual-core processing chip (ARM + DSP), to ensure start-up time less than 1S.
- \* One key ask for help calling to the duty room to achieve quick connection, and easy operation.
- \* One key ask for alarm, This terminal can be used for alarm task trigger equipment.
- \* Built-in high sensitivity microphone, with wide area for sound collection, and high sound reproduction.
- \* Built-in 3W full-range monitor speaker, with loud and clear voice.
- \* Support hands-free calling and broadcast receiving.
- \* Support local electronic door lock and local alarm indicator ( select 1 from 2 options).
- \* Support local access to short-circuit signal.
- \* With DC power supply interface, to connect external 24V adapter.
- \* Two installation methods: embedded and surface mounted installation.
- \* Protection class: IP55.

### Specifications


Model	T-7703E
Network Interface	Standard RJ45 input
Transmission Rate	100Mbps
Support Protocol	TCP/IP,UDP,IGMP(Multicast)
Audio Format	MP3
Audio Mode	16 bit CD quality
Sampling Rate	8K~48KHz
MIC input Sensitivity	10mV
Frequency Response	317Hz~3.4KHz
Overall Power Consumption	10W
THD	≤ 1%
SNR	> 65dB
Operation Temperature	-20℃~60℃
Operation Humidity	20% ~ 80% relative humidity, non-condensing
Protection Grade	IP55
Input Power	~190-240V 50/60Hz(The power adapter); DC24V/1A
Dimension	132×81×39mm
Weight	0.5Kg

### Connections

#### Equipped with hidden way

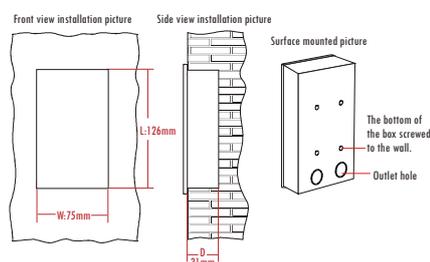

#### With the way

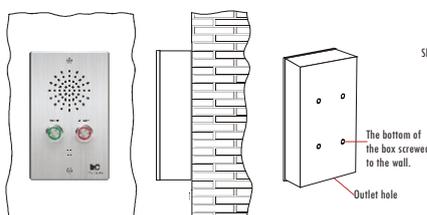

#### Connection mode

