


OD-610 - PROFESSIONAL RANGE

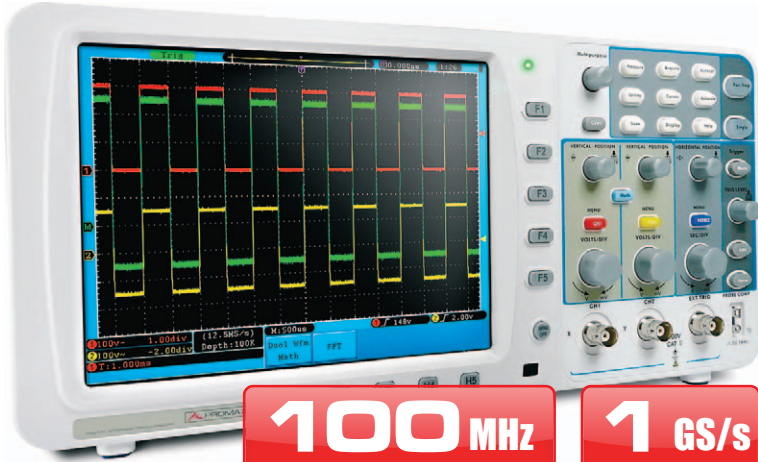

100 MHz
PROFESSIONAL RANGE

1 GS/s
SAMPLE RATE

PROMAX OD-610 is a digital storage oscilloscope featuring up to 100 MHz of bandwidth and up to 1 GS/s real time sample rate. This professional range digital oscilloscope features an unprecedented large 8" high resolution display.

They include advanced functions such as several trigger modes, 19 automatic measurements, waveform storage and USB connectivity.

*Their ultra-thin body (just 8 cm depth), compact design and light weight makes these **PROMAX** digital oscilloscopes ideal not only for desktop applications such as circuit design or production lines but also for those cases that demand to carry the instrument from one location to another: automobile maintenance and testing, education and training, etc.*

- ✓ Bandwidth: 100 MHz
- ✓ Sample rate: 1 GS/s
- ✓ Up to 100 K record length (10 M optional)
- ✓ Ultra thin body (7 cm depth)
- ✓ 8" high resolution color LCD-TFT display, 800x600 pixels
- ✓ 19 automatic measurements. Math functions and Pass/Fail function
- ✓ Communication interfaces: USB host, USB device, Pass/Fail, LAN, VGA (optional)



OD-610 - PROFESSIONAL RANGE

SPECIFICATIONS	OD-610 DIGITAL STORAGE OSCILLOSCOPE - PROFESSIONAL RANGE
Bandwidth	100 MHz
Sample rate	1 GS/s
Horizontal scale (s/div)	From 2 ns/div to 100 s/div, 1-2-5 steps
Rise Time (at input, typical)	≤3.5 ns
Trigger type	Edge, Pulse, Video, Slope, Alternate
Channel	2+1 (external)
Display	8" color LCD, TFT display, 800x600 pixels
Input impedance	1 MΩ ±2 %, in parallel with 15 pF ±5 pF
Channel isolation	100:1 (50 Hz), 40:1 (10 MHz)
Max input voltage	400 V (PK-PK) (DC+AC, PK-PK)
DC gain accuracy	±3 %
Record length	10 K, 100 K (10 M optional)
DC accuracy (average)	Average ≥16: ±(3% reading + 0.05 div) for ΔV
Probe attenuation factor	1x, 10x, 100x, 1000x
LF respond (AC, -3 dB)	≥5 Hz (at input, AC coupling, -3 dB)
Sampling rate / Relay time accuracy	±100 ppm
Interpolation	sin(x) / x
Interval (ΔT) accuracy (full bandwidth)	Single: ±(1 interval time + 100 ppm x reading + 0.6 ns) Average > 16: ±(1 interval time + 100 ppm x reading + 0.4 ns)
Input coupling	DC, AC and GND
Vertical resolution (A/D)	8 bits resolution (2 channels simultaneously)
Vertical sensitivity	5 mV/div - 5 V/div (at input)
Trigger mode	Auto, Normal, Single
Trigger level	±6 divisions from screen center
Line / Field frequency (video)	NTSC, PAL and SECAM
Cursor measurement	ΔV and ΔT between cursors
Automatic measurements	V _{PP} , V _{AVG} , V _{RMS} , Freq, Period, V _{MAX} , V _{MIN} , V _{TOP} , V _{BASE} , Overshoot, Preshoot, Rise time, Fall time, Delay A→B ↑, Delay A→B ↓, +Width, -Width, +Duty, -Duty
Waveform math	+, -, x, ÷, invert, FFT
Waveform storage	15 waveforms
Lissajous figure	Full bandwidth. Phase difference: ±3 degrees
Communication interface	USB host, USB device, Pass/Fail, VGA (optional), LAN
Cymometer	Available
Power supply	From 100 to 240 V, 50/60 Hz, CAT II
Power consumption	< 18 W
Fuse	2 A, T class, 250 V
Dimensions	348 (W.) x 170 (H.) x 78 (D.) mm
Weight (without package)	1.50 kg
Accessories	Power cord, CD-ROM, user manual, USB cable, probe, probe adjust, soft bag (optional)

DESIGN AND SPECIFICATIONS ARE SUBJECT TO CHANGES WITHOUT PRIOR NOTICE 06-14