

LC3-UC06E Ceiling Loudspeaker

www.boschsecurity.com



BOSCH
Invented for life



- ▶ Suitable for speech and music reproduction
- ▶ Light weight ABS material
- ▶ Easy to install
- ▶ Unobtrusive design
- ▶ EN 54-24 certified

The LC3-UC06E is a general purpose, cost-effective 6 W ceiling loudspeaker, suitable for 100 V connection with power tapping of: 6, 3, 1.5 and 0.75 Watt. The optional back-box LC3-CBB fully protects the loudspeaker from dust and dripping water from above, according IP21C. The loudspeaker frame, grill and back-box are manufactured from self-extinguishing ABS according to UL 94V0.

Certifications and approvals

Quality assurance

All Bosch loudspeakers are designed to withstand operating at their rated power for 100 hours in accordance with IEC 268-5 Power Handling Capacity (PHC) standards. Bosch has also developed the Simulated Acoustical Feedback Exposure (SAFE) test to demonstrate that they can withstand two times their rated power for short durations. This ensures improved reliability under extreme conditions, leading to higher customer satisfaction, longer operating life, and lessens the chance of failure or performance deterioration.

Emergency	According to BS 5839-8 According to EN 54-24
CE	Declaration of Conformity
Safety	According to EN 60065
UL compliancy	According to UL 94 V 0



Notice

To be compliant with EN 54-24:

The loudspeaker must be installed with the back-box LC3-CBB.

Region	Certification
Poland	CNBOP

Installation/configuration notes

Installation is easy with integral spring arms that securely hold the ceiling loudspeaker in its cut-out. Ceilings from 5 to 25 mm thick can be accommodated. A template is also provided for accurately marking the cut-out in ceiling panels.

The loudspeaker has built-in protection to ensure that, in the event of a fire, damage to the loudspeaker does not result in failure of the circuit to which it is connected. In this way, system integrity is maintained; ensuring loudspeakers in other areas can still be used to inform people of the situation.

The loudspeaker has a ceramic screw-terminal connection block, thermal fuse and heat-resistant high temperature wiring.


Four primary taps for 100 V are provided on the matching transformer to allow selection of nominal full-power, half-power, quarter-power and one-eighth-power.

The optional back-box (LC3-CBB) protects the rear of the loudspeaker from dust, falling objects, makes the unit vermin proof and prevents sound traveling via the ceiling cavity to adjacent areas.


The back-box is assembled with the loudspeaker by means of a snap-in construction and has knock-out holes for two grommets (11 mm) and for two cable glands (20.5 mm).




LC3-CBB

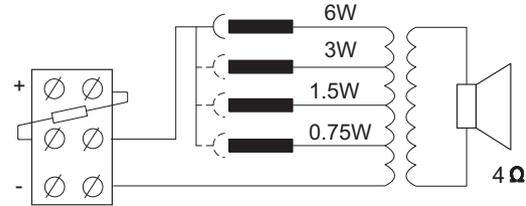

Circuit diagram LC3-UC06E

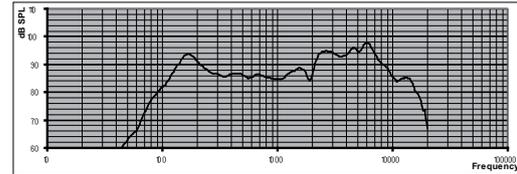


Frequency response LC3-UC06E

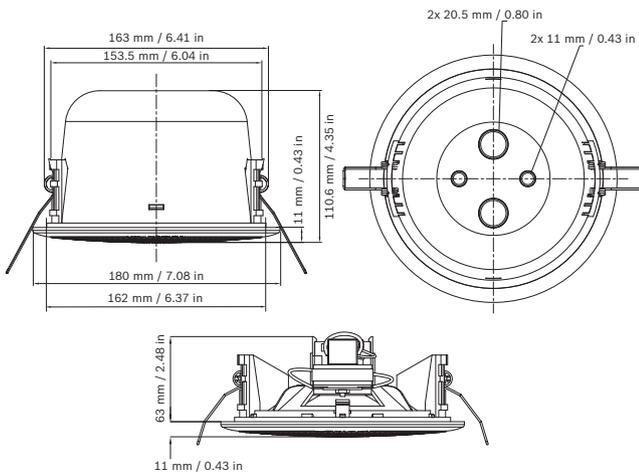


Mechanical diagram LC3-UC06E and LC3-CBB




LC3-UC06E and LC3-CBB

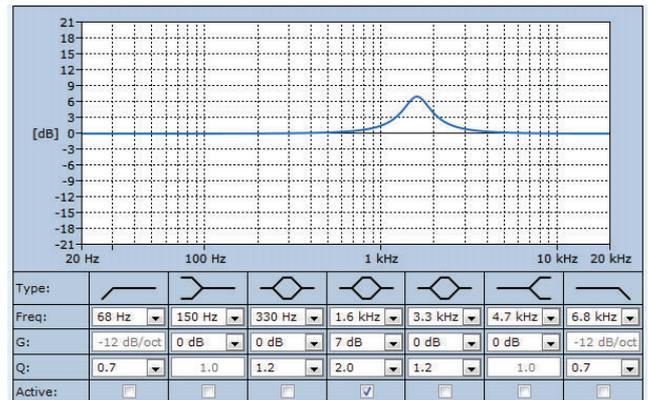

LC3-UC06E specified active equalization required for EN 54-24

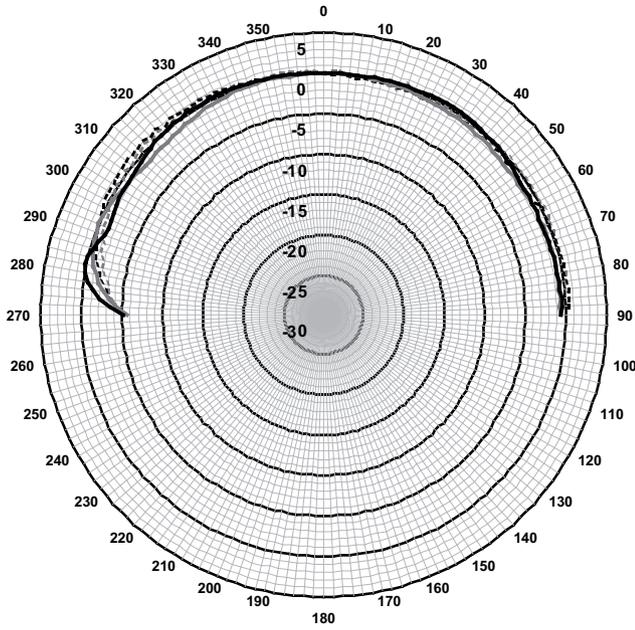

LC3-UC06E horizontal/vertical polar diagram (low frequency). Normalized at 0-degrees axis

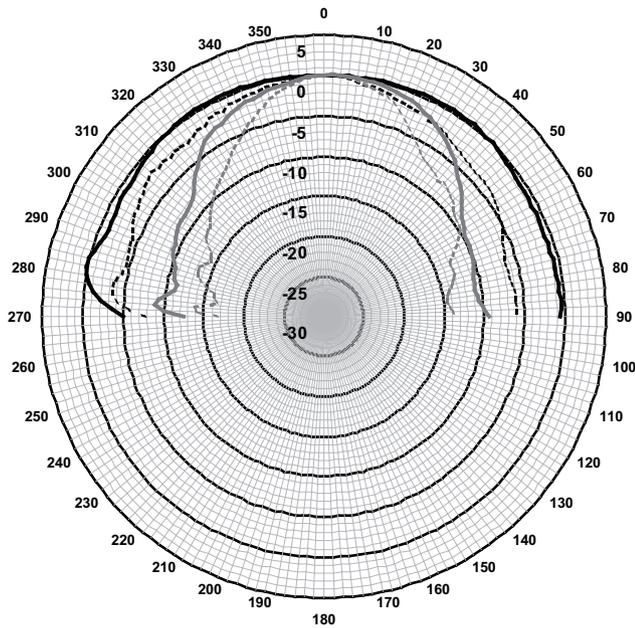

LC3-UC06E horizontal/vertical polar diagram (high frequency). Normalized at 0-degrees axis

Octave band sensitivity LC3-UC06E *

	Octave SPL 1W/1m	Total octave SPL 1W/1m	Total octave SPL Pmax/1m
125 Hz	91.3	-	-
250 Hz	89.1	-	-
500 Hz	86.2	-	-
1000 Hz	85.5	-	-
2000 Hz	89.4	-	-
4000 Hz	93.2	-	-
8000 Hz	92.7	-	-
A-weighted	-	88.0	94.7
Lin-weighted	-	89.0	96.0

Octave band opening angles LC3-UC06E

	Horizontal	Vertical
125 Hz	180	180
250 Hz	180	180
500 Hz	180	180
1000 Hz	180	180
2000 Hz	180	180
4000 Hz	85	85
8000 Hz	56	56

Acoustical performance specified per octave

* (all measurements are done with a pink noise signal; the values are in dB SPL)

Parts included

Quantity	Components
1	LC3-UC06E Ceiling Loudspeaker
1	Installation Instruction
1	Ceiling cut-out template

Technical specifications

Electrical

	LC3-UC06E
Description	Ceiling loudspeaker
Maximum power	9 W
Rated power	6 W (6/3/1.5/0.75 W)
Sound pressure level at 6 W power / 1 W (1 kHz, 1 m)	94 dB / 86 dB (SPL)

Opening angle at 1 kHz / 4kHz (-6 dB)	180° / 85°
Effective frequency range (-10 dB)	90 Hz to 20 kHz
Rated voltage	100 V
Rated impedance	1667 Ohm
Electrical connection	3-pole ceramic screw terminal block
Acceptable wire gauge	0.5 – 3 mm ²

Mechanical

	LC3-UC06E	LC3-CBB
Description	Ceiling Loudspeaker	Back-Box
Diameter	180 mm (7.08 in)	148 mm (5.82 in)
Mounting cut-out	167 mm (6.57 in)	-
Max. ceiling thickness	5 to 25 mm (0.19 to 0.98 in)	-
Maximum depth	63 mm (2.48 in)	96.3 mm (3.79 in)
Material (frame, front grille)	ABS	ABS
Weight	538 g (1.19 lb)	110 g (0.24 lb)
Color	White (RAL 9010)	White (RAL 9010)

Environmental

Operating temperature	-25 °C to +55 °C (-13 °F to +131 °F)
Storage temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative humidity	<95%



1438

Bosch Security Systems BV
Torenallee 49, 5617BA Eindhoven, The Netherlands
10
1438-CPD-0336

EN 54-24:2008

Loudspeaker for voice alarm systems
for fire detection and fire alarm systems for buildings

Ceiling loudspeaker 6 W and accessories
LC3-UC06E, LC3-CBB
Type A

Ordering information

LC3-UC06E Ceiling Loudspeaker

Ceiling loudspeaker 6 W, circular ABS grille and frame, ceiling mounted by 2 integral spring arms, EN54-24 certified, white RAL 9010.

Order number **LC3-UC06E**

Accessories

LC3-CBB Back Box

Back box for LC3 ceiling speakers, fully protects the loudspeaker from dust and dripping water, makes the unit vermin proof and prevents sound traveling via the ceiling cavity to adjacent areas, white RAL 9010.

Order number **LC3-CBB**

Represented by:

Americas:

Bosch Security Systems, Inc.
12000 Portland Avenue South
Burnsville MN 55337, USA
Phone: +1-800-392-3497
Fax: +1-800-955-6831
audiosupport@us.bosch.com
www.boschsecurity.com

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com