

Readers

Dear customers, your use of the broadcasting company speaker series. We would like to extend my heartfelt thanks to all of the Company manufactured products have been tested before, the commitment to keep its quality. Loud - speakers broadcast Pan-for hotels, commercial buildings, supermarkets, schools, leisure and entertainment venues, is your ideal choice. For your installation, commissioning and use of this product, the installation please read this note.

Safety Tips

- Please be sure to use the former reading detailed notes.
- Really pay attention to this manual and a safety with the important warning.
- Recommend that you keep this manual for future reference.

Common warning signs and security

The manual shown warning signs and security is to prevent the improper operation due to personal injury arising from the loss of property, please read before using this product must understand that this manual security symbols and Warning to indicate fully aware of potential risks.



Warning

Such as the inappropriate use of staff will cause injury, death and property damage.

When installed loudspeakers

- Restricted by the provisions of the speakers on the voltage, such as the use of high voltage may cause electric shock or fire disaster. Is no pruning, distorted, or replacement of damaged wires.
- Avoid instability in the installation or set up speakers, such as shaking the table or flat surface, the speaker can avoid falling caused personal injury or property damage.
- Speakers will be installed in support of the speaker or the weight of a solid shelf. Speaker swap can be avoided caused personal injury or property damage.
- Wet hands must not be admitted into or plugs, may lead to electric shocks.
- The allocation of plugs, make sure that pull plugs, rather than pull wires. The use of a damaged power line of machinery may cause fire or electric shock.
- Mobile speaker, you plug the prior allocated. If the speaker and plugs may be moving together will cause fire or electric shock. For plugs, identified as plugs for grip.
- Will not be allowed to speakers on the vent cover. May cause internal heating caused by the fire.
- Avoid speakers installed in the humidity or dust, direct contact with the sun from the near-electric, or smoke or steam, may cause fire or electric shock.



WALL MOUNT SPEAKER



TS-9/TS-9W

OWNER'S MANUAL

Descriptions


Single 18-inch low-speakers, the use of net enclosures used (black / white) low-loss speaker rough surface reticulate network, the appearance of significant zhuo The atmosphere, but also a more transparent sound quality, purity. Stiffness to provide full, strong bass rhythms, specifically for small Disco-type systems.

Specifications

Model	TS-9	TS-9W
Power	40W	
Max Power	80W	
Impedance	COM/8 Ω	
SPL(1W/1M)	96dB	
Freq Resp	55Hz-18KHz	
Dimensions	380×277×218mm	
Weight	5.5Kg	

Connection


The speaker's "+" side (red) with the power of the "+" side (red) to connect, "-" terminal (black) and the power of "-" Terminal (black) connection.

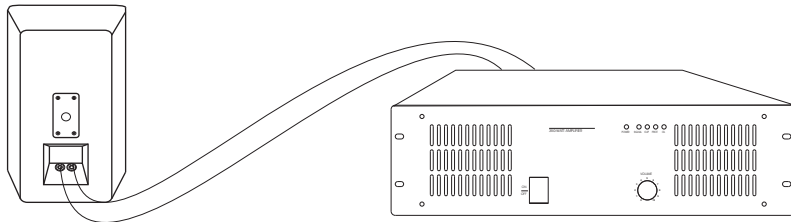

Then after a good line, should be the volume of power to minimize twisting, and then open the amplifier, select the appropriate program source, the volume can be opened to the appropriate location.


Product installation

①




1. The combination chart for mounting bracket .

②




2. Fixing one end of the mounting bracket on the wall.

③




3. Fixing another end of the mounting bracket on corresponding place on rear panel.

④

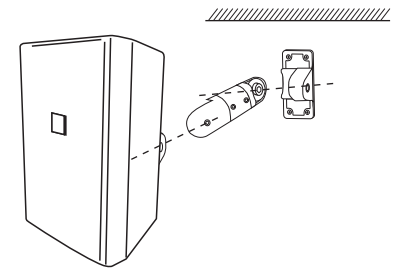

4. Using accessories of middle part to fix together two ends of the mounting bracket.

⑤



5. Adjusting the angle of the mounting bracket: the angle could be adjusted basing on actual demand from up to down 180 degree . After adjustment, to fix the mounting bracket with screws.