

Readers

Dear customers, your use of the broadcasting company speaker series. We would like to extend my heartfelt thanks to all of the Company manufactured products have been tested before, the commitment to keep its quality. Loud - speakers broadcast Pan-for hotels, commercial buildings, supermarkets, schools, leisure and entertainment venues, is your ideal choice. For your installation, commissioning and use of this product, the installation please read this note.

Safety Tips

- Please be sure to use the former reading detailed notes.
- Really pay attention to this manual and a safety with the important warning.
- Recommend that you keep this manual for future reference.

Common warning signs and security

The manual shown warning signs and security is to prevent the improper operation due to personal injury arising from the loss of property, please read before using this product must understand that this manual security symbols and Warning to indicate fully aware of potential risks.

	Warning Such as the inappropriate use of staff will cause injury, death and property damage.
--	---

When installed loudspeakers

- Definitely will not be allowed to speakers and any exposure in the rain-wet or water, may be inconsistent with ,or fire.
- Restricted by the provisions of the speakers on the voltage, such as the use of high voltage may cause electric shock or fire disaster. Is no pruning, distorted, or replacement of damaged wires.
- Avoid instability in the installation or set up speakers, such as shaking the table or flat surface , the speaker can avoid falling caused personal injury or property damage.
- Speakers will be installed in support of the speaker or the weight of a solid shelf. Speaker swap can be avoided caused personal injury or property damage.
- Wet hands must not be admitted into or plugs, may lead to electric shocks.
- The allocation of plugs, make sure that pull plugs, rather than pull wires. The use of a damaged power line of machinery may cause fire or electric shock.
- Mobile speaker, you plug the prior allocated. If the speaker and plugs may be moving together will cause fire or electric shock. For plugs, identified as plugs for grip.
- Will not be allowed to speakers on the vent cover. May cause internal heating caused by the fire.
- Avoid speakers installed in the humidity or dust, direct contact with the sun, from the near-electric, or smoke or steam, may cause fire or electric shock.




Ceiling Speaker



T-205T/206T/208T


OWNER'S MANUAL

Dimension

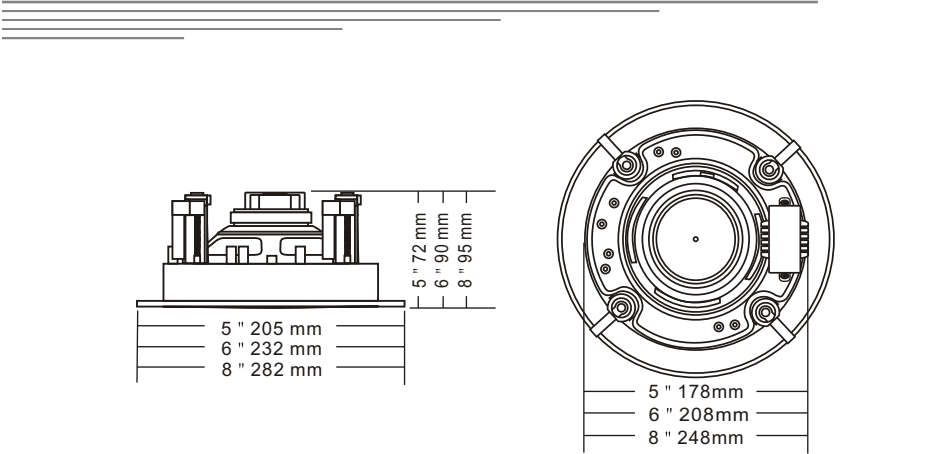

T-205T/206T/208T

Installation

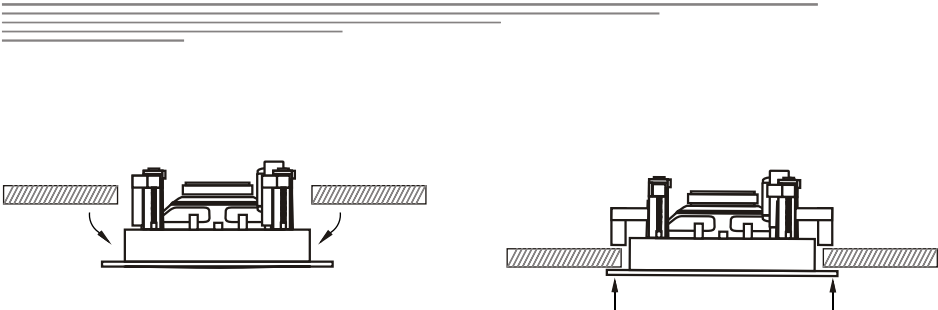

Step 1 With measurement tools needed to detect speaker hole, and then open a hole in the ceiling, and then through the open well hole wiring connected to the speaker on.


Step 2 Of the mask opening speaker.

Step 3 Speakers installed in the ceiling and fixed. So close to the edge of the ceiling speakers, rotating clockwise and tighten the screws.

Specifications

Model	T-205T	T-206T	T-208T
Power@100V	1.25/2.5/5/10W	2.5/5/10/20W	3.75/7.5/15/30W
Power@70V	0.65/1.25/2.5/5W	1.25/2.5/5/10W	1.87/3.75/7.5/15W
Impedance	Black:COM Blue:8KΩ / Red:4KΩ / Green:2KΩ / White:1KΩ	Black:COM Blue:4KΩ / Red:2KΩ / Green:1KΩ / White:500Ω	Black:COM Blue:2.6KΩ / Red:1.3KΩ / Green:670Ω / White:330Ω
SPL(1W/1M)	91dB	92dB	94dB
Freq Resp	80-20KHz	70-20KHz	60-20KHz
Speaker Driver	5 " ×1 1.5 " ×1	6.5 " ×1 1.5 " ×1	8 " ×1 1.5 " ×1
Cutout Size	178mm	208mm	248mm
Dimensions	205X72mm	232X90mm	282X95mm
Weight	0.9Kg	1.2Kg	1.6Kg

Label stickers

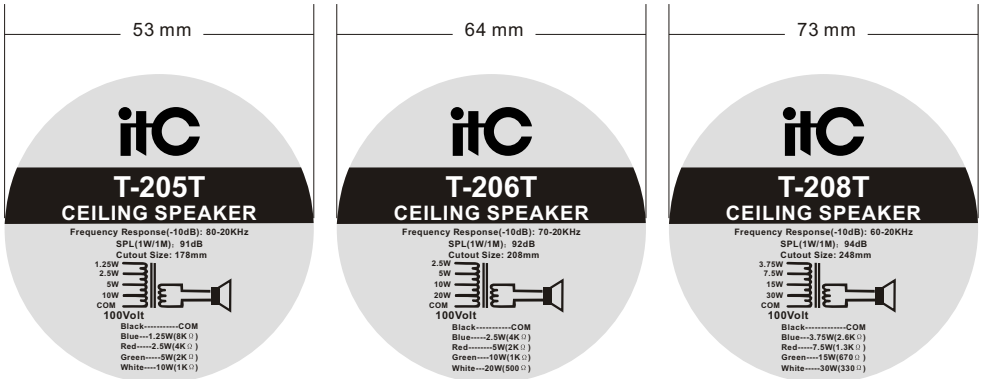

T-205T

T-206T

T-208T