

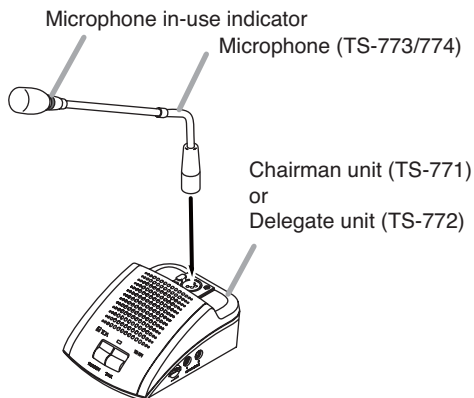
**MICROPHONES**
**TS-773  
TS-774**

Thank you for purchasing TOA's Microphones.

Please carefully follow the instructions in this manual to ensure long, trouble-free use of your equipment.

**1. GENERAL DESCRIPTION**

The TS-773 and TS-774 Microphones are designed for exclusive use with the Chairman and Delegate units of TOA Conference system. A ring indicator light at the microphone head shows the operation status of the Chairman or Delegate unit.

**2. INSTALLATION**

**3. SPECIFICATIONS**

Model No.	TS-773	TS-774
Type	Electret condenser microphone	
Directivity	Unidirectional	
Rated Impedance	1.8 k $\Omega$	
Rated Sensitivity	-37 dB (1 kHz, 0 dB = 1 V/Pa)	
LED Indicator	Speech indicator (ring type)	
Frequency Response	100 – 13,000 Hz	
Output Connector	Equivalent to XLR-4-32	
Finish	Gooseneck: Stainless steel, black Other: ABS resin, black	
Length	368 mm (14.49")	518 mm (20.39")
Weight	90 g (3.17 oz)	105 g (3.7 oz)
Applicable Unit (Option)	TS-771 Chairman unit, TS-772 Delegate unit	

**Note:** The design and specifications are subject to change without notice for improvement.