

Applications

- Gigabit Ethernet 1000BASE-T
- Switch to Switch interface
- Switched backplane applications
- Router/Server interface
- Other optical transmission systems



Product Features

- Up to 1.25Gb/s bi-directional data links
- Compact RJ-45 connector
- Hot pluggable SFP footprint
- 1 Gigabit Ethernet over Cat 5 cable
- Applicable for 100m distance transmission
- Low power consumption, < 1.2W
- Access to physical layer IC via 2-wire serial bus
- 1000 BASE-T operation in host systems with SERDES interface
- 10/100/1000Mbps compliant in host systems with SGMII interface
- Operating case temperature:
- Operating case temperature: 0 to 70 °C

General

SFP-1G-RJ45 - is high performance, cost effective module compliant with the Gigabit Ethernet and 1000-BASE-T standards as specified in IEEE 802.3-2002 and IEEE 802.3ab, which supporting 1000Mbps data-rate up to 100 meters reach over unshielded twisted-pair CAT 5 cable. The module supports 1000 Mbps (or 10/100/1000Mbps) full duplex data-links with 5-level Pulse Amplitude Modulation (PAM) signals. All four pairs in the cable used with symbol rate at 250Mbps on each pair. The module provides standard serial ID information compliant with SFP MSA, which can be accessed with address of A0h via the 2wire serial CMOS EEPROM protocol. The physical IC can also be accessed via 2wire serial bus at address ACh.

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit	Note
Supply Voltage	Vcc	-0.5	4.0	V	
Storage Temperature	Ts	-40	85	°C	
Relative Humidity	RH	0	85	%	

Note: Stress in excess of the maximum absolute ratings can cause permanent damage to the transceiver

General Operating Characteristics

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Data Rate	DR	10		1000	Mb/s	
Supply Voltage	V _{cc}	3.13	3.3	3.47	V	
Supply Current	I _{cc5}		320	375	mA	
Operating Case Temp.	T _c	0		70	°C	

Low-Speed Signals Electrical Interface (T_{OP(C)} = 0 to 70 °C, V_{CC} = 3.13 to 3.47 V)

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
SFP Output _Low	V _{OL}	0		0.5	V	1
SFP Output _High	V _{OH}	V _{cc} - 0.5		V _{cc} +0.3	V	1
SFP Input _Low	V _{IL}	0		0.8	V	1
SFP Input _High	V _{IH}	2.0		V _{cc} +0.3	V	1

Notes:

- 4.7k to 10k pull-up to host _ V_{cc}, measured at host side of connector
- MOD_DEF (1) (SCL) and MOD_DEF(2) (SDA), are open drain CMOS signals. Both MOD_DEF (1) and MOD_DEF(2) must be pulled up to host_ V_{cc}.


High-Speed Electrical Interface (T_{OP(C)} = 0 to 70 °C, V_{CC} = 3.13 to 3.47 V)

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Transmitter						
Line Frequency	FL		125		MHz	2
Tx Output Impedance	Z _{out,tx}		100		Ω	3
Rx Input Impedance	Z _{in,rx}		100		Ω	3
Single ended data input swing	V _{in}	250		1200	mV	
Single ended data output swing	V _{out}	350		800	mV	
Rise/Fall Time	Tr/Tf		175		ps	4
Tx Input Impedance	Z _{in,tx}		50		Ω	
Rx Output Impedance	Z _{out,rx}		50		Ω	

Notes:

- All high-speed signals are AC-coupled internally.
- 5-level encoding, per IEEE 802.3
- Differential, for all Frequencies between 1MHz and 125MHz Differential.
- 20%-80%

Pin Definitions and Functions

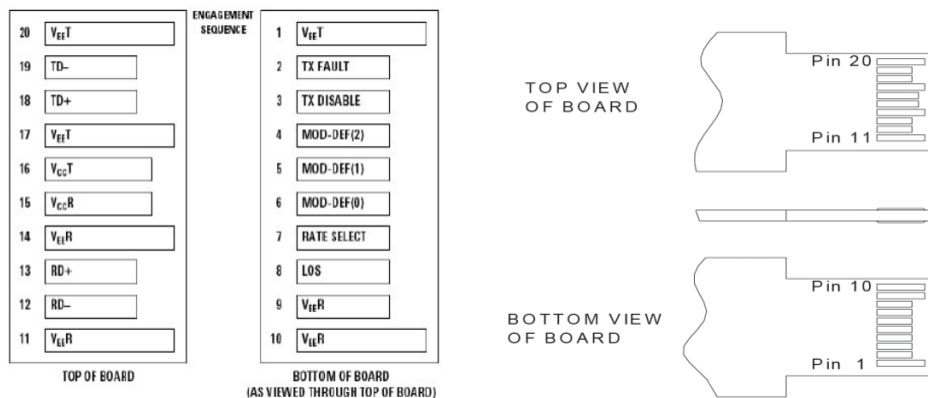


Pin	Symbol	Name/Description
1	V _{EE} T	Tx ground
2	Tx Fault	Transmitter Fault. Not supported
3	Tx Disable	Transmitter Disable. PHY disabled on high or open
4	MOD-DEF2	Module Definition 2. Data line for serial ID
5	MOD-DEF1	Module Definition 1. Clock line for serial ID
6	MOD-DEF0	Module Definition 0. Grounded within the module
7	Rate select	No connection
8	LOS	Loss of Signal indication.
9	V _{EE} R	Rx ground
10	V _{EE} R	Rx ground
11	V _{EE} R	Rx ground
12	RD-	Receiver Inverted DATA out. AC coupled
13	RD+	Receiver Non-inverted DATA out. AC coupled
14	V _{EE} R	Rx ground
15	V _{CC} R	Rx power supply
16	V _{CC} T	Tx power supply
17	V _{EE} T	Tx ground
18	TD+	Transmitter Non-Inverted DATA in. AC coupled
19	TD-	Transmitter Inverted DATA in. AC coupled
20	V _{EE} T	Tx ground

Notes:

1. Circuit ground is connected to chassis ground
2. PHY disabled on TDIS > 2.0V or open, enabled on TDIS < 0.8V
3. Should be pulled up with 4.7k – 10k Ohms on host board to a voltage between 2.0 V and 3.6 V. MOD_DEF(0) pulls line low to indicate module is plugged in.
4. LVTTTL compatible with a maximum voltage of 2.5V. Not supported on GE-GB-P.

Package Dimensions

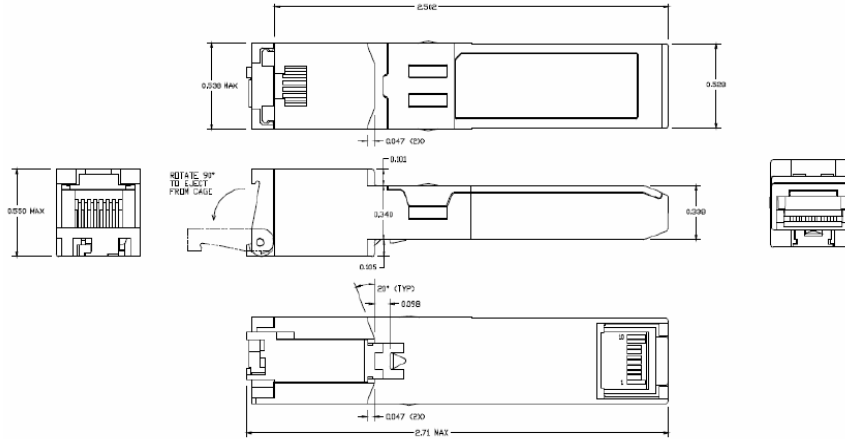

Ordering Information

Part Number	Output Power	Rec. Sens	Data Rate	Package	Distance
SFP-1G-RJ45	N/A	N/A	10/100/1000M	Copper SFP	100M