

# Technical data sheet

## Tapered pipe air-termination rod

Item no. 5401995



- Suitable for wind loads according to Eurocode 1: DIN EN 1991-1-4
- From a free length of > 2.5 m, an additional fastening, e.g. insulated spacer is recommended
- Last metre is tapered from Ø 16 mm to Ø 10 mm, material: AlMgSi
- Matches stand system FangFix

**Alu** Aluminium

### Master data

Item no.	5401995
Type	101 VL4000
Description 1	Tubular interception rod
Description 2	tapered
Dimension	4m
Material	Aluminium
Material symbol	Alu
Quality	AlMg 3
Smallest sales unit (VG)	1,00 Piece
Weight	120,00 kg/100 pc.


# Technical data sheet

## Tapered pipe air-termination rod

Item no. 5401995



### Technical data

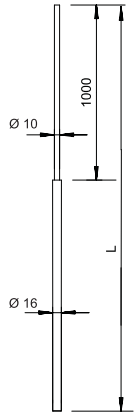

Length	4.000,00 mm
Connection	Round conductor
Version	Tapered air-termination rod
High voltage-resistant, insulated version	<input type="checkbox"/>
Nominal size Ø	10/16 mm