5" Two Way Wall Mount Speaker(3.75W-7.5W-15W-30W)

Features

- Built-in 100v/70v transformer
- Wall mount type loudspeaker
- 5" +1.5" two ways speaker unit
- Power taps 3.75w-7.5w-15w-30w @100V plus 8ohm
- Metal grille, ABS enclosure and stainless mounting bracket

Description

The T-775P is a wall mount speaker built-in 70v/100v transformer. The 70v/100v transformer technique reduces line losses on longer distance and allows easy parallel connection of multiple loudspeakers.

The built-in 5"+1.5" two ways speaker driver is designed of wide frequency response 125-14kHz, the multiple power taps 3.75W, 7.5W, 15W & 30W are helpful for different applications varies from room size and ambient noise surroundings.



The metal grille, ABS enclosure and stainless mounting bracket are of black color. Easy and secure wall mount installation through the supplied mounting bracket.

It is ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.

Specification

Model	T-775P
Power Taps @100V	3.75W, 7.5W, 15W, 30W
Power Taps @70V	1.9W, 3.75W, 7.5W, 15W, 30W
Transformer Impedance	2.6ΚΩ/1.3ΚΩ/670Ω/330Ω/165Ω
Input	70V/100V/8Ω
SPL(1W/1M)	92dB
Max. SPL (Rated W/1M)	107dB
Frequency Response (-10dB)	125-18KHz
Finish	Baffle: ABS, Black/WhiteGrille: Steel, Black/White
Speaker Driver	5" x1 1.5" x 1
Dimensions	248 x 185 x182mm
Weight	2.7kg
Mounting	With mounting bracket fixed by screw


Website: www.itc-pa.com.cn; Mail: info@itc-pa.com.cn



Appearance:



Direction Diagram:

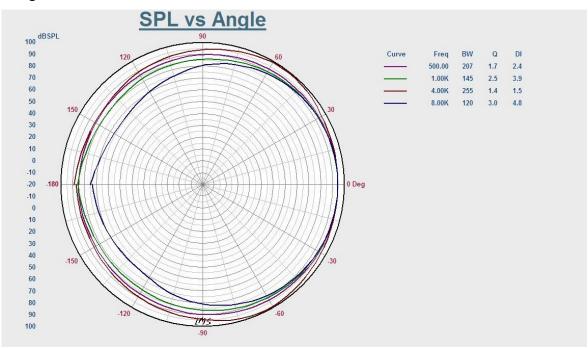

Frequency Response:

