

TOA REMOTE AUDIO CONTROL PANEL WITH TOUCH DISPLAY

M-800RCT-EB


DESCRIPTION

Designed for exclusive use with the M-8080D, the M-800RCT Remote Audio Control Panel with touch display, can do volume adjustments, routing choices, preset choices, and give system information.

SPECIFICATIONS

Power Source	24V DC (Powered by M-8080D or M-804EX or external)
RD IN	Transmits and receives AES3 digital audio plus control data Connect to M-8080D, M-804EX or M-800RC, M-800RCT for daisy chain, RJ45 Connector
RD EXP	Transmits and receives control data Connect to M-800RC or M-800RCT, RJ45 Connector
Display	LCD Display Displays device information : ID, Volume, preset, communication status, system, etc.
Operating Temperature	0°C to +40°C (32 °F to 104 °F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Panel: Polycarbonate + ABS, white (RAL9016 or equivalent)
Dimensions	150 (W) X 115 (H) X 28 (D) mm (5.90" X 4.53" X 1.10")
Weight	0.28 kg
Accessory	Wall mounting screw (4 x 30) ×4, Box mounting screw (4 x 20) ×4, Plastic anchor ×4

APPEARANCE

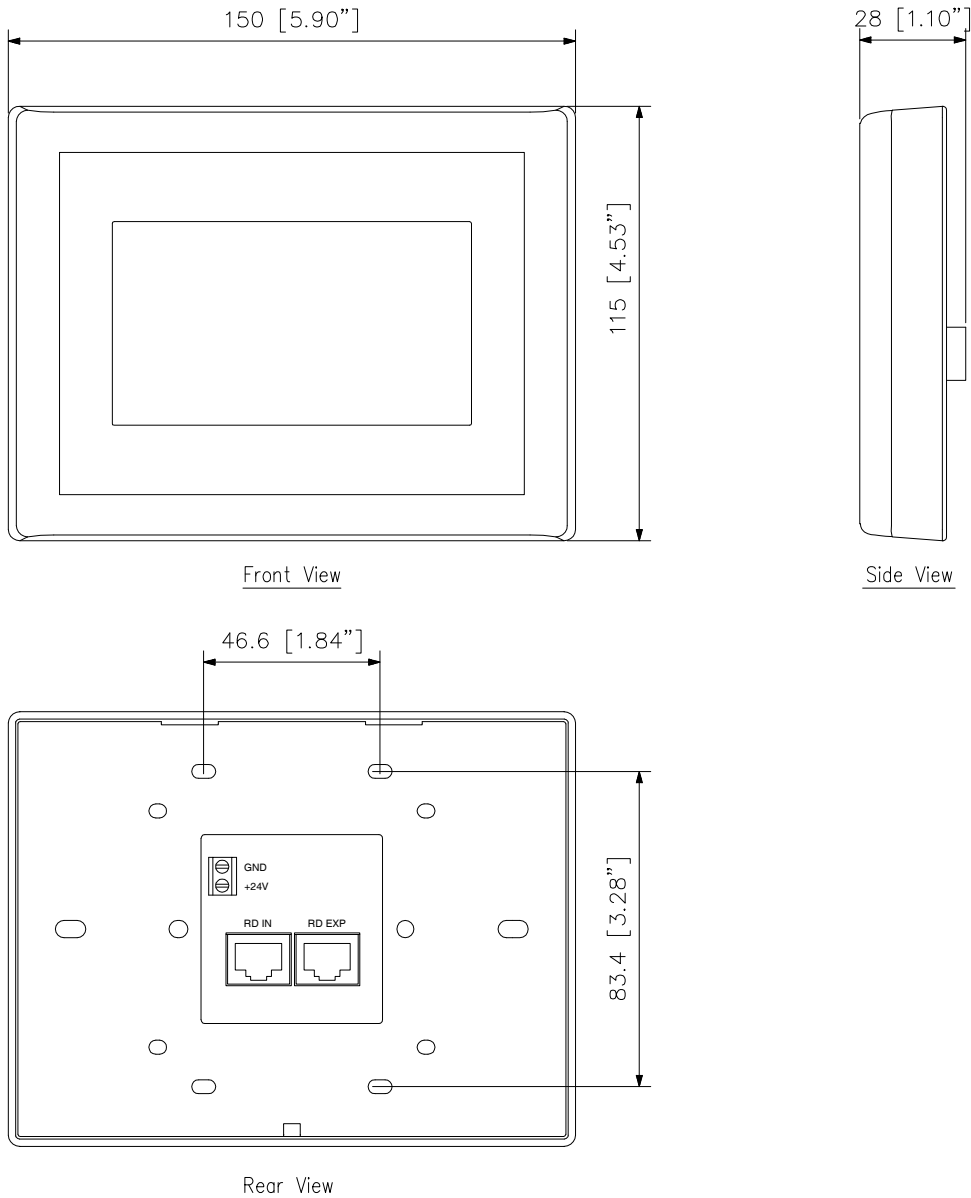

UNIT:mm SCALE:1/2